

STANDARD BID SOLICITATION DOCUMENT
GOVERNMENT OF GUYANA



***Design, Supply, Installation and
Commissioning of Solar Photovoltaic Systems
and Distribution Networks for Hinterland
Communities in Guyana Lots (1-4)***

GUYANA ENERGY AGENCY

March, 2025



GOODS AND RELATED SERVICES (VALUE G\$15 million and above)

Introduction

Preface

This Standard Bid Solicitation Document (SBSD) has been prepared by the National Procurement and Tender Administration Board (NPTAB) for use by Procuring Entities for the procurement of goods and services. The procedures and methods presented in this document have been developed on the basis of practical experience and are mandatory for use in the procurement carried out in whole or in part from the state funds in accordance with the provisions of Guyana's Public Procurement Legislation.

In order to simplify the preparation of the bid document for each individual procurement proceeding, the SBSBD groups the provisions that are not intended to be changed in "the Instructions to Bidders" and in "the General Conditions of Contract". Data and provisions specific to each procurement and contract should be included in the Bid Data Sheet, the Special Conditions of the Contract, Technical specifications, price schedule, schedule of requirements and the Evaluation Criteria. The applicable forms are listed in the table of contents, below.

Request for additional information can be forwarded to:

The Guyana Energy Agency
295 Quamina Street, South Cummingsburg, Georgetown
Tel Numbers: 592- 226-0394 ext. 223/241
gea@gea.gov.gy
<https://gea.gov.gy/>

CONTENTS

Invitation For Bids (IFB)	3
Instructions To Bidders (ITB)	4
Bid Data Sheet (BDS)	11
General Conditions of Contract (GCC)	14
Special Conditions of Contract (SCC)	17
Delivery Schedule	20-50
Technical Specifications	51-83
Supplier's Bid	84
Price Schedule	85-119
Contract	120
Bid Security	121
Manufacturer's Authorization	122
Performance Security	123
Letter of Acceptance	124
Authorization for Signing the Bid	125
Evaluation and Qualification criteria	126-127
Pending Litigation Form	128

INVITATION FOR BIDS (IFB)

1. **The Guyana Energy Agency** hereinafter referred to as “the Procuring Entity”, invites eligible bidders to submit bids for the **Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lot 1-4:**

Lot 1: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Regions 1 and 4

Lot 2: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Regions 7 and 8

Lot 3: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Region 9

Lot 4: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Region 10

Bidder can bid per individual lot or a combination of lots

2. Required period of supply: **One hundred and Eighty (180) days from the signing of the Contract.**

Bidders are required to visit the site to carry out their own assessment of how the systems will be installed. GEA would facilitate contacting the appropriate entities and request access to the site by the bidders upon the bidder’s request. The costs of visiting the site shall be at the bidder’s own expense.

3. The bidding documents may be obtained and be examined by any interested bidder. Bids can be purchased for a non-refundable fee in the amount of **Two thousand dollars Guyana Dollars (G\$2,000)** from the Cashier at the *Guyana Energy Agency, 295 Quamina Street, South Cummingsburg, Georgetown*, telephone 592-226-0394 or fax 226-5227, email at gea@gea.gov.gy. Alternatively, interested eligible bidders may download a free copy of the Bidding Documents from the GEA website at www.gea.gov.gy
4. All Bidders should submit their bids together with an original bid security of 2% of the tendered amount not later than 9:00 hours on the **April 10th, 2025** at the: **National Procurement & Tender Administration Board, Ministry of Finance, 49 Main & Urquhart Streets, Georgetown.**

Clarifications must be submitted in writing to the GEA’s email address at gea@gea.gov.gy no later than one week prior to the deadline for bid submission.

5. Bids shall be valid for ninety (90) days after the date of bid opening.
6. Bids shall be opened by the National Procurement and Tender Administration Board in the presence of Bidders’ representatives who wish to attend, at 9:00 hours on **April 10th, 2025** at the address: 49 Main and Urquhart Streets, Georgetown.



Scan the QR Code Below to access the
Tender Opening Process Virtually
via Microsoft Teams
(THURSDAYS)



<https://bit.ly/3vtP0OB>

https://teams.microsoft.com/l/meetupjoin/19%3ameeting_NWI2NTczNWUtMGY0NS00Njg3LTlhODEtMTNIOWUzNmRiNzg2%40thread.v2/0?context=%7b%22Tid%22%3a%22ff1d4318-046e-4143-8bac-9d503f00d12b%22%2c%22Oid%22%3a%22a0f8d988-3b0f-4653-a082-3a86d9ff7a9e%22%7d

7. Bidders are required to complete the Bidders Registration via the following NPTA website:
<https://www.npta.gov.gv/bidders-registration/>.



.....
Dr. Mahender Sharma-Chief Executive Officer

Guyana Energy Agency

INSTRUCTIONS TO BIDDERS

A. Introduction

1. Description of the Procurement

The Procuring Entity identified in the *Bid Data Sheet* intends to procure the goods identified in the *Bid Data Sheet* and in the Schedule of Requirements.

2. Eligibility and Qualifications of Bidders

- 2.1 In order to be awarded a procurement contract, Bidders should possess the technical and financial capacity needed to perform the contract, should fulfill their tax and social insurance fund liabilities in Guyana, should not currently be subject to a debarment penalty, and must comply with the specific eligibility and qualification requirements referred to in the *Bid Data Sheet and Evaluation Criteria*.
- 2.2 The bidders should not have conflicts of interest, including involvement in more than one bid in this proceeding, should not be associated nor have been associated in the past, directly or indirectly, with any agency or any of its representative(s), affiliate(s), that have been engaged by the Procuring Entity to provide consulting services at the preparation stage of the bidding documents, technical specifications and other documentation that are subject to be used in the procurement of goods which must be purchased in accordance with the Invitation for Bids. In cases when the indicated facts are discovered, the Bidder's bid shall be rejected.

B. Bidding Documents

3. Clarification and Amendment of Bidding Documents

- 3.1 The Procuring Entity, in not more than three (3) working days, will respond in writing or electronic mail to any request for clarification of the bidding documents to be received (in writing or electronic mail) not later than seven (7) days before the expiry of a deadline for submission of bids. At the same time, the Procuring Entity's response shall without identifying its source of the request, be distributed to all bidders who have received the bidding documents from the Procuring Entity.
- 3.2 At any time before the deadline for submission of bids, the Procuring Entity may amend the bid documents by issuing an Addendum to the bidders.

C. Preparation of Bid

4. Language of Bid

- 4.1 The bid prepared by the Bidder, as well as all correspondence and documents related to that bid and exchanged by the Bidder and the Procuring Entity shall be written in the language *specified in the Bid Data Sheet*.

5. Documents Included in Bid

- 5.1 The bid prepared by the Bidder should contain the Form of Bid, the Price Schedules and the other documents to be submitted in accordance with these Instructions to Bidders, Bid Data Sheet and Evaluation Criteria.

6. Bid Price

- 6.1. Subject to the choice of INCOTERMS as indicated in the Bid Data Sheet, the prices given in the Price Schedule shall include all transportation costs to the destination point indicated in the Contract, all taxes, duties, payments collected, in accordance with the laws of Guyana and delivery related and other costs on performing of contractual obligations.
- 6.2. The prices offered by the Bidders shall remain fixed during the whole period of Contract performance and shall not be modified in any circumstance.

7. Bid and Payment Currency

- 7.1 The prices shall be indicated in Guyana Dollars, unless otherwise specified in the *Bid Data Sheet*.

8. Bid Security

- 8.1 Unless otherwise provided in the *Bid Data Sheet*, the Bidder shall furnish, as part of his bid, an original Bid Security, in the form, currency and amount specified in the *Bid Data Sheet* with a validity period for not less than two (2) weeks upon the expiry of the bid validity period and in accordance with the specified form.
- 8.2 The bid security may be forfeited, if the Bidder:
- (a) withdraws their bid after it is opened during the period of validity specified in the bid; or,
 - (b) having been awarded the contract fails:
 - (1) to sign the contract on the terms and conditions provided in their bid; or
 - (2) to furnish the Performance Security, if required to do so.

9. Period of Validity of Bid

- 9.1 Bids shall remain in force during the period specified in *the Bid Data Sheet* after the date of bid opening.

10. Format, Signing and Submission of Bid

- 10.1 The Bidder shall prepare one (1) original bid and two (2) hard copies which shall be completed in writing in indelible ink and shall be signed by the Bidder, or by the person (persons) duly authorized to sign the bid in accordance with the power of attorney and 2 (two) exact electronic PDF copies of the bid on Flash Drive, to be submitted with the bid. All pages of the bid where new information, modifications or erasures entered shall be initialed (signed) by the person or persons signing the bid. In the event of discrepancies between them, the original shall prevail.
- 10.2 The bid shall contain no interlineations, erasures or overwriting, except the cases when the Bidder needs to correct errors which must be initialed by the person or persons signing the bid.
- 10.3 The Bidder shall seal the original and Electronic PDF copies of the bid in different envelopes, marking them “ORIGINAL” and “COPIES”, as appropriate. The envelopes shall then be sealed in an outer envelope.
- 10.4 The outer envelope shall:

- (a) be addressed to the **Chairman, National Procurement & Tender Administration Board (NPTAB), Main & Urquhart Streets, Georgetown** (the address specified in the Invitation for Bids);
- (b) bear the Name of the Project **“Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lot 1-4, ”** and the words: **“DO NOT OPEN BEFORE”** 9:00 hours on **April 10th, 2025.**

11. Deadline for Submission of Bids

- 11.1 Bids must be received by the Procuring Entity at the address and within the periods specified in the *Bid Data Sheet*. All bids received by the Procuring Entity upon the expiry of a period established for submission of bids as indicated by the Procuring Entity shall be rejected and returned to the Bidder unopened.

12. Modification and Withdrawal of Bids

- 12.1 The Bidder may modify or withdraw their bid after the bid's submission, provided that the Procuring Entity will receive a written notice of modification, substitution or withdrawal of bid before the deadline for submission of bids.
- 12.2 The Bidder's modification, substitution or withdrawal notice shall be prepared, sealed, marked, and sent in accordance with the provisions of ITB Clause 10. In that case the outer and inner envelopes will be additionally marked as **“MODIFICATION”** or **“WITHDRAWAL”**, as appropriate. A withdrawal notice may also be sent by email with a subsequent written confirmation not later than the deadline for submission of bids.



D. Opening and Evaluation of Bids

13. Opening of Bids

- 13.1 The Procuring Entity will open all bids in the presence of bidders' representatives who wish to attend, at the time, on the date, and at the address specified in the *Bid Data Sheet*. The bidders' representatives who are present shall sign a register evidencing their attendance.
- 13.2 The bidders' names, bid prices, including alternatives (if permitted), information on the presence or absence of required bid security, information on the presence (absence) of tax debts and debts of social insurance payments will be announced at the opening. No bid shall be rejected at the opening, exclusive of late bids and unidentified Bids to be returned to the Bidder unopened.
- 13.3 Bids and modifications sent pursuant to ITB Clause 12.2 that are not opened and read out during the bid opening shall not be accepted for further evaluation, regardless of circumstances.

14. Evaluation of Bids

- 14.1 During the evaluation of bids, the Procuring Entity may, at its discretion, request the Bidder to provide clarification of their bid. The request for clarification and the response thereto shall be made in writing, and in that case no change in price or substance of the bid shall be sought, offered, or permitted.
- 14.2 The Procuring Entity shall determine the responsiveness of each bid to requirements of the bidding

documents. For the purposes of this Clause a substantially responsive bid is one which satisfies all the indicated provisions without a material deviation or reservation.

- 14.3 The Procuring Entity may regard a tender as responsive if it contains any minor deviations, that do not materially alter or depart from the characteristics, terms and conditions and other requirements of the bid solicitation documents, or if it contains errors or oversights that are capable of being corrected without touching the substance of the tender. To the extent feasible and appropriate, for the purposes of comparing bids, acceptable deviations shall be quantified in monetary terms and reflected in adjustments to the bid price (for the purposes only of comparison of bids).
- 14.4 Arithmetical errors shall be rectified in the following manner. If there is a discrepancy between the unit price and the total price that is obtained by multiplying the unit price and quantity, the unit price shall prevail, and the total price shall be corrected. If there is a discrepancy between words and figures, the amount in words shall prevail. If the Bidder disagrees with such correction of errors, their bid shall be rejected.
- 14.5 The Procuring Entity shall evaluate and compare only the bids that are determined to be responsive to the Bid Solicitation Document.

15. Confidentiality and Contacting the Procuring Entity

- 15.1 No Bidder shall contact the Procuring Entity on any matter related to their bid from the date of bid opening until the date of contract award, except for requests related to clarification of the bid. Information concerning the evaluation of bids is confidential.
- 15.2 Any effort by the Bidder to influence the Procuring Entity's decision on bid evaluation and comparison, or contract award may result in the rejection of that Bidder's bid and subjected to debarment in accordance with Regulation 3(1)(b) of the Procurement (suspension and debarment) Regulations 2019.

E. Award of Contract

16. Award Criteria

- 16.1 Subject to ITB Clause 18, the Procuring Entity will award the Contract to the Bidder whose bid is determined to be substantially responsive to the requirements of the bid solicitation document, and who offered **the Lowest Evaluated Bid**, provided that the Bidder has been determined:
- (a) to be eligible pursuant to Clause 2;
 - (b) to comply with qualification requirements, in accordance with Clause 2, and any technical requirements and evaluation criteria disclosed in the bid solicitation documents.

17. Procuring Entity's Right to Vary Quantities at Time of Entering into a Contract

- 17.1 The Procuring Entity reserves the right, when entering into a contract, to increase or decrease the quantity of goods and related services specified in the Schedule of Requirements, by the percentage indicated in the *Bid Data Sheet*, no change in the unit price or other conditions shall be made (an increase of quantity **not exceeding 10 percent variation**)

18. Procuring Entity's Right to Accept Any Bid and to Reject All Bids

- 18.1 The Procuring Entity reserves the right to accept or reject any bid or all bids, and to cancel the bidding process at any time prior to award of contract, without thereby incurring any liability to Bidders and without being required to inform the Bidder or Bidders of reasons of such actions.

19. Notification of Award

- 19.1. The bidder whose bid is accepted will be notified of the award of contract by the Purchaser prior to expiration of the bid validity period.
- 19.2. The notice of acceptance shall be given to the successful bidder within fourteen (14) days of the award of contract.
- 19.3. At the same time that the Procuring Entity notifies the successful Bidder in accordance with sub-clause (1), the Procuring Entity will notify all other Bidders of the name of successful Bidder, and their bid price.

20. Signing of Contract and Performance Security

- 20.1 The Procuring Entity will send the successful Bidder the Form of Contract contained in the bid solicitation document. The successful Bidder shall sign and date the Contract and return it to the Procuring Entity within seven (7) days of receipt of notice of award.
- 20.2 Together with the signed Contract, the Bidder shall, if required to do so by the *Bid Data Sheet*, furnish the Procuring Entity with a Performance Security in the amount and form specified in the *Bid Data Sheet*.
- 20.3 If the successful Bidder fails to furnish the performance security, if required to do so, or within 7 (seven) days fails to return the Contract signed by them, then it shall be a sufficient ground to refuse the award of Contract, and to forfeit the bid security. In that case the Procuring Entity shall award the Contract to the next lowest evaluated Bidder, subject to the right of the Procuring Entity to reject all bids.

21. Settlement of Disputes

- 21.1 To settle the disputes which may arise during the execution of Contract, the parties shall follow the procedure referred to in the *Bid Data Sheet*.

22. Corrupt and Fraudulent Practices

- 22.1 The Procuring Entity requires that Bidders observe the highest standards of ethics during the bidding process and execution of such contracts. In pursuance of this policy, the Procuring Entity:
- (a) will reject the bid if it establishes that the Bidder recommended for award has engaged in corrupt, fraudulent, collusive, or coercive practices in competing for the Contract in question.
 - (b) refer the matter to the Public Procurement Commission (PPC) in accordance with the provisions of Procurement (Suspension and Debarment) Regulations 2019.

23. Compliances

- 23.1 Bidder must submit valid certificates of compliances from Guyana Revenue Authority (GRA), National Insurance Scheme (NIS), and VAT registration (*where applicable*).

24. Defects Liability:

- 24.1 The “Defects Liability Period” for the goods and related services is six (6) months from the date of taking over possession or such other period as may be specified in the Bid Data Sheet. During this period, the supplier will be responsible for rectifying any defects or replacement of goods free of cost to the Procuring Entity.

BID DATA SHEET (BDS)

The following specific data to clauses of the provisions of Instructions to Bidders which supplement or amend the provisions of the Instructions to Bidders (ITB). Whenever there is a conflict, the provisions herein shall prevail over those in ITB.

Item No.	
ITB 1.1	<p>Guyana Energy Agency, 295 Quamina Street, South Cummingsburg, Georgetown, Tel:226-0394, gea@gea.gov.gy.</p> <p>The subject of the procurement is: <i>Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lot 1-4:</i></p> <p><i>Lot 1: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Regions 1 and 4</i></p> <p><i>Lot 2: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Regions 7 and 8</i></p> <p><i>Lot 3: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Region 9</i></p> <p><i>Lot 4: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Region 10</i></p> <p><u>Bidder can bid per individual lot or a combination of lots</u></p>
ITB 2.1	To qualify for award of the Contract, the bidders shall meet the qualification requirements set out in the evaluation criteria (page 126-127)
ITB 4.1	Language of Bid shall be English Language All submission must be in English
ITB 5.1	<p>The Bidder shall submit the following additional documents in its bid:</p> <ol style="list-style-type: none"> 1. Evidence of Financial Capability in the amount of 30% of the bid price in the form of a bank statement as at January 2023 or letter of credit from a commercial bank in the name of the bidder. Letter of credit must state a figure. The document must be dated within one month of the bid opening date and be clearly legible. When a photocopy of the letter of credit or bank statement is presented, it must be certified a "true copy of the original" by the issuing company. 2. Submission of a valid business registration or certificate of incorporation, inclusive of list of directors, that is clearly legible. Where bidder is part of an unincorporated joint venture, a legible copy of joint venture agreement is required. Copy of joint venture agreement must state the joint venture partner to which invoice will be paid and contract to be signed. Where bidder is a joint venture company, a legible copy of certificate of incorporation is to be submitted. Each party must submit valid compliance as per items 2 and 3 of the Evaluation Criteria. 3. Written confirmation of authorizing signatory must be provided. For the incorporated company this must be in the form of a Power of Attorney endorsed by a Commissioner of Oaths or Justice of Peace. For a registered business that has appointed an employee to sign the bid, a letter of authorizing signatory must be provided.

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION

13 MAR 2025

APPROVED

4. Valid certificates of compliance from **GRA and NIS and VAT registration** (only applicable to Bidders resident in the country of the Procuring Entity).
 5. Completed **litigation form** on page 128 of the bidding documents.
 6. A **letter stating any or no termination or abandonment** of projects. The letter must be dated within one month of the bid opening date.
 7. Provide documentary evidence that the goods are ISO certified and Tropic resistant;
 8. Provide documentary evidence that the PV modules comply with **IEC 61215, IEC 62804 and UL 1703 listed for Crystalline Silicon PV Modules** (or equivalent) standards, and that the inverters are UL 1741 listed or equivalent.
 9. Provide documentary evidence to demonstrate that the Goods offered meet all the **technical specifications** of the bidding document. Technical literature must include data sheets and specific technical information on each of the items of equipment and components proposed for the photovoltaic system;
 10. A detailed schematic design layout for the solar PV systems (schematic should be NEC 2017 Compliant), including explanatory notes for sizing of equipment and components that comprise the system, and energy production calculations using a PV modelling software;
 11. **Certificates of product quality** (modules and inverters) issued by a recognized laboratory accredited by the International Laboratory Accreditation Cooperation (ILAC) and which must be valid up to the date of commissioning of the system;
 12. Documentary evidence that batteries comply with **IEC 61427:1999** and the manufacturing process conformed to environmental management standard ISO 14001.
 13. An **implementation schedule** indicating important milestones such as equipment delivery to site, installation, testing and commissioning. Frequent (at least monthly) progress reports and work plan are to be provided to the Procuring Entity as required by the procuring entity during project execution.
 14. Bidder must provide **audited financial statements** for the past three years for incorporated companies. Financial statements must be audited by a Chartered accountant/accountancy firm and include an auditor's note. OR Registered businesses must provide Balance Sheets, Profit and Loss Accounts, and Income and Expenditure Accounts for the past three years. These financial statements must be approved by a Chartered accountant/accountancy firm.
- The detailed evaluation criteria can be found on Page 126-127 of the bidding documents

ITB 6.1	The price quoted by bidders shall be on the basis of CIF to port Georgetown for goods delivered to Guyana, including cost for transport to the site. 2010 incoterms are applicable. Bidders shall quote for the <i>Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana for the Guyana Energy Agency per lot</i> .
ITB 7.1	Currency of Bid shall be in Guyana Dollars.
ITB 8.1	A bid security of two percent (2%) of the tendered sum is required in the form of a Bank guarantee or a bond from an Insurance company licensed by the Bank of Guyana.
ITB 9.1	The period of validity of bid is ninety (90) days

GENERAL CONDITIONS OF CONTRACT (GCC)

The General Conditions are the Standard General Conditions of Contract. No alteration shall be made on the pages of these Conditions. The Procuring Entity, when amending or supplementing the General Conditions of Contract should do so only in the Special Conditions of Contract. Any amendment or addenda of the General Conditions of Contract shall conform to the legislation of Guyana.

1. Definitions and application

1.1 This Contract lists below the terms that have the following interpretation:

- (a) **“Contract”** means the agreement entered into between the Procuring Entity and the Supplier, as recorded in the Form of Contract signed by the parties, including all attachments and appendices thereto and all the documents referenced therein.
- (b) **“Contract Price”** means the price payable to the Supplier under the Contract for complete and proper performance of his contractual obligations.
- (c) **“Goods”** means the item (s) referred to in the Schedule of Requirements contained in the Bid Solicitation Document.
- (d) **“GCC”** means the General Conditions of Contract contained in this Section.
- (e) **“SCC”** means the Special Conditions of Contract.
- (f) **“Procuring Entity”** – means the Procuring entity carrying out the procurement of Goods, specified in the SCC.
- (g) **“Supplier”** means an individual or legal entity, or a combination of any abovementioned forms which operate under the existing agreement as a joint venture and supply the Goods and Services under the Contract.
- (h) **“Day”** means calendar day.

1.2 The General Conditions of Contract shall apply in the procurement of goods; the specific amendment, addition and alteration shall be indicated in the Special Conditions of Contract.

1.3 Warranty requirements are as specified in the Special Conditions of Contract.

2. Contract Documents

2.1 Subject to the order of precedence set forth in the Contract Agreement, all documents forming the Contract (and all parts thereof) are intended to be correlative, complementary, and mutually explanatory. The contract shall be read as a whole.

3. Performance Security

3.1 If required by the SCC, within seven (7) days of receipt of notification of award, the successful Bidder shall furnish the Procuring Entity with the performance security the amount and form of which are indicated in the SCC.

4. Packing

- 4.1 The Supplier shall provide such packing of the Goods as is required to prevent their damage or deterioration during transit to the final destination specified in the Contract, and as may be required by the Special Conditions of Contract.

5. Delivery, Transportation, Mobilization Advance

- 5.1 The Supplier must deliver the Goods within the periods and to the Destination point indicated in the Schedule of Requirements and shall provide the documentation indicated in the SCC. Subject to the SCC, transportation of the Goods to the place specified by the Procuring Entity shall be carried out and paid by the Supplier and related costs shall be included in the Contract Price.

6. Payment

- 6.1 The payment to the Supplier for the Goods delivered shall be made in accordance with the Contract in the form and within the periods specified in the SCC.
- 6.2 If the Procuring Entity does not pay the Supplier the sum due within the periods specified in the Contract, in that case the Procuring Entity shall pay the Supplier [interest at the rate specified or determined pursuant to the Special Conditions of Contract].

7. Prices

- 7.1 Prices established by the Supplier in the Contract for goods delivered shall not vary from the prices quoted by the Supplier in his bid.

8. Assignment

- 8.1 The Supplier shall not assign, in whole or in part, his obligations under the Contract to a third party for the execution without the Procuring Entity's prior written consent.

9. Delays in the Supplier's Performance and Liquidated Damages

- 9.1 Delivery of the Goods shall be carried out by the Supplier, in accordance with the schedule indicated by the Procuring Entity in the *Schedule of Requirements*.
- 9.2 Except as provided under GCC Clause 13, any delay in the Supplier's performance of their delivery obligations shall render the Supplier liable for payment of liquidated damages in the amount specified in the SCC, unless an extension of time is agreed upon by the parties without application of liquidated damages. Once the maximum deduction specified in the SCC is reached, the Procuring Entity may consider termination of the Contract, in accordance with Clause 10 of the General Conditions of Contract.

10. Termination

- 10.1 The Procuring Entity, without detriment to any other sanctions of infringement of the provisions of Contract, by written notice of default sent to the Supplier, may terminate this Contract in whole or in part:
- (a) if the Supplier fails to deliver a portion or all of the Goods within the periods provided for in the Contract, or within an extension period of that Contract, or to perform any of his obligations under the Contract.

- (b) if bankruptcy procedures are applied to the Supplier, or it is declared insolvent.
- (c) if the Supplier, in the Procuring Entity's opinion, has engaged in corrupt, fraudulent, collusive or coercive practices when entering into or executing the Contract.
- (d) If the Procuring Entity deems that continued implementation of the contract would no longer be expedient from the standpoint of the public interest.

10.2 The notice of termination shall specify the reason of termination, the extent to which performance of the Supplier under the Contract is terminated, and the date upon which such termination becomes effective.

10.3 Notwithstanding clauses 9 and 10.1(d), the Supplier shall not forfeit their performance security, and shall not be liable for payment of liquidated damages, or termination for default, if delay in executing the Contract or failure to perform obligations under the Contract is the result of an event of force majeure. When force majeure arises, the Supplier shall promptly notify the Procuring Entity in writing of such circumstance and its causes.

10.4 When the contract is terminated in accordance with clause 10.1(d), the Goods that are complete and ready for shipment within twenty-eight (28) days after the Supplier's receipt of notice of termination shall be accepted by the Procuring Entity at the Contract terms and prices. For the remaining Goods, the Procuring Entity may elect:

- (a) to have any portion completed and delivered at the Contract terms and prices; and/or
- (b) to cancel the remainder and pay to the Supplier an agreed amount for partially completed Goods and Related Services and for materials and parts previously procured by the Supplier.

11. Settlement of Disputes

11.1 If any dispute or disagreement arises between the Procuring Entity and the Supplier for the Contract or in connection with it, the parties shall make every effort to resolve the dispute or disagreement amicably by mutual consultation.

11.2 If during twenty one (21) days, the parties failed to resolve their dispute or disagreement by mutual consultation; either the Procuring Entity or the Supplier may send the other party the notice of intent to commence arbitration, if an arbitration is incorporated in the Contract in the Special Conditions of Contract or otherwise agreed by the parties, or in the Court of General Jurisdiction if no arbitration is envisaged, and no arbitration or litigation in respect of that matter may be commenced unless such notice is given.

Any dispute or disagreement in respect of which the notice of intent is sent to commence trial shall be heard by the [Court of General Jurisdiction].

11.3 Notwithstanding any reference to dispute settlement herein, the parties shall continue to perform their obligations under the Contract, unless they agree otherwise.

12. Applicable Law

12.1 The Contract shall be interpreted in accordance with the Laws of Guyana.

13. Formal Communication between the Procuring Entity and the Supplier

13.1 Any notice given by one party to the other pursuant to the Contract shall be in force if it is done

in writing and sent at the address of other party in the SCC.

13.2 A notice shall be effective when delivered or on the specified date, whichever is later.

14. Taxes and Duties

14.1 The Supplier shall be fully responsible for all taxes, duties, license taxes, etc., levied in accordance with the legislation of Guyana, and subject to the application of INCOTERMS in accordance with the SCC.

15. Retention

15.1 No retention shall be applied on consumables, but warranties, guarantees and expiry dates to apply.

15.2 Retention on fixed assets shall be determined by the Procuring Entity on a case-by-case basis.

SPECIAL CONDITIONS OF CONTRACT (SCC)

The following Special Conditions of Contract shall supplement the General Conditions of Contract. Whenever there is a conflict, the provisions herein shall prevail over those in the General Conditions of Contract.

GCC Clause No.	Special Conditions of Contract
1.1	<p>Definitions</p> <p>The Procuring Entity is the Guyana Energy Agency, 295 Quamina Street, South Cummingsburg, Georgetown, Tel: 592-226-0394, Fax:226-5227, gea@gea.gov.gy.</p> <p>The Supplier is _____ (indicate full name, legal address, phone, fax and e-mail of Supplier)</p> <p>The Subject of procurement is <i>Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lots 1-4</i></p> <p>Warranty</p> <p>The supplier warrants all Goods supplied under the contract are new, unused, and of the most recent or current models, and that they incorporate all recent improvements in design and materials, unless provided otherwise in the contract. The supplier further warrants that all Goods supplied under this contract shall have no defect, arising from design, materials or workmanship or from any act or omission of the supplier, that may develop under normal use of the supplied Goods in the conditions prevailing in the country of final destination.</p> <p>24 months complete system warranty is applicable from provisional acceptance date. A final completion certificate shall be issued upon satisfactory commissioning of the systems.</p>
3.1	<p>Performance Security:</p> <p>The amount and form of Performance Security is: 10% of the contract price in the form of a Bank Guarantee or a bond from an Insurance company licensed by the Bank of Guyana. The bond shall be valid for the entirety of the contract period.</p>
4.1	<p>Packing:</p> <p>The Supplier shall provide such packing of the Goods as is required to prevent damage or deterioration during transit to final destination, as indicated in the Contract. The packing shall be sufficient to withstand, without limitation, rough handling during transit and exposure to extreme temperatures, salt and precipitation during transit.</p>
5.1	<p>Delivery, Transportation</p> <p>The following documentation is to be provided by the Supplier to the Procuring Entity:</p> <ul style="list-style-type: none"> (1) Copies of Supplier's invoice(s) indicating a description, quantity, unit price of the Goods and sum total. (2) Shipping order, railway receipt or truck receipt. (3) Warranty certificate of Manufacturer or Supplier;

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION

13 MAR 2025

APPROVED

	<p>(4) Inspection certificate issued by the authorized inspection service, and the supplier's factory inspection report (if any);</p> <p>(5) Certificate of origin;</p> <p>(6) Certificate of conformity</p> <p>(7) Certificate of Quality</p>
6.1	<p>Payment schedule: Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lots 1-4 as per Price Schedule below:</p> <p>(a) Ten percent (10%) of the contract price within 14 days of signing the contract and the submission of the performance bond.</p> <p>(b) Ten percent (10%) of the contract price upon physical verification by the Procuring Entity that poles have been installed by the contractor and have complied with the technical specifications.</p> <p>(c) Ten percent (10%) of the contract price upon physical verification by the Procuring Entity that MV and LV Cables and Main Line Hardware have been installed by the contractor and have complied with the technical specifications.</p> <p>(d) Ten percent (10%) of the contract price upon physical verification by the Procuring Entity that Solar PV modules and Mounting structures have arrived in the country and comply with the technical specifications.</p> <p>(e) Fifteen percent (15%) of the contract price upon physical verification by the Procuring Entity that PV Inverters/Hybrid Inverter/Battery Inverter have arrived in the country and comply with the technical specifications</p> <p>(f) Fifteen percent (15%) of the contract price upon physical verification by the Procuring Entity that Battery Energy Storage System and Battery Racks have arrived in the country and comply with the technical specifications</p> <p>(g) Twenty percent (20%) of the contract price upon acceptance of the completed and integrated fully functional system by the Procuring Entity.</p> <p>(h) Ten percent (10%) of the contract price upon expiry of the defects' liability period barring the correction of defects.</p>
9.2	<p>Liquidated Damages Applicable rate: 0.05% per week for untimely execution of order. Maximum deduction: 10% of the delayed works/delivery</p>
11.2	<p>Settlement of Disputes Disputes arising out of or in connection with the Contract shall be settled in accordance with the Laws of Guyana.</p>
14.1	<p>Taxes and Duties The version edition of INCOTERMS shall be: 2010</p>
16.1	<p>Defects Liability The duration of the defect's liability period is 6 MONTHS following provisional acceptance. During this period, the contractor will be responsible for rectifying any defects free of cost to the Procuring Entity.</p>

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION

13 MAR 2025

APPROVED

DELIVERY SCHEDULE/ SCHEDULE OF REQUIREMENTS

The delivery schedule expressed as days specifies hereafter the date of delivery to destination point. In column "the delivery schedule", the Procuring Entity shall indicate the date from which schedule starts. It should be either the date of award, or the date of signing of Contract, or the date of opening of letter of credit, or the date of confirming the letter of credit (subject to circumstances). The Form of Bid shall specify only reference to that schedule.

Lot No.	Brief Description of Goods	Quantity	Place of Delivery	Procuring Entity's Completion Schedule (---days as of signing of the contract)	Bidder's Offered Completion Schedule	
					Earliest Delivery	Latest Delivery
Lot 1	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in the village of Kariako, Region One</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 	To be determined by bidder	Kariako: 7.376416°; -59.707078°	180 days		

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**

13 MAR 2025

APPROVED

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
Lot 1	<p>Design, Supply & Construction of an Overhead 1km Low Voltage 120/240Vac Electrical Distribution Network at Karaiko:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network. - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 	To be determined by bidder	Kariako: 7.376416°; - 59.707078°	180 days		
Lot 1	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in White Water and Arakuru, Region 1 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System 	To be determined by bidder	White water: 8.154117°; - 59.900772°	180 days		

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**

13 MAR 2025

APPROVED

	<p>g) Web-based system energy monitoring system</p> <p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
<p>Lot 1</p>	<p>Design, Supply & Construction of an Overhead Electricity Distribution Network in White Water, Region 1:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network. - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are 	<p>To be determined by bidder</p>	<p>White water: 8.154117°; - 59.900772°</p>	<p>180 days</p>		

	<p>required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)</p> <ul style="list-style-type: none"> - Vegetation Clearing along distribution network/cable route - Transportation of Material 					
<p>Lot 1</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Mashabo Region, 1 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site, n) Lightning Protection equipment integrated into the Solar PV Array and BoS System. 	<p>To be determined by bidder</p>	<p>Mashabo: 7.047308°; -58.553850°;</p>	<p>180 days</p>		

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

Design, Supply & Construction of an Overhead Low Voltage 120/240Vac Electrical Distribution Network at Mashabo, Region 1:

Lot 1

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings
- Supply and Installation of Complete Guy Sets Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)
- Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

To be determined by bidder

Mashabo: 7.047308°; -58.553850°;

180 days

Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic Inclusive of a 265kWh energy storage system in St. Cuthbert's Mission, Region 4 as follows:

Lot 1

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices

To be determined by bidder

St. Cuthbert's Mission: 6.365080°; -58.095653°

180 days



	<p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrd Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>						
<p>Lot 1</p>	<p>Design, Supply & Construction of a 0.85km Overhead Low Voltage 120/240Vac Electrical Distribution Network at St. Cuthbert's Mission, Region 4:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution 	<p>To be determined by bidder</p>	<p>St. Cuthbert's Mission: 6.365080°; - 58.095653°</p>	<p>180 days</p>			

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
APPROVED
13 MAR 2025

APPROVED
 13 MAR 2025
 TENDER ADMINISTRATION & PROCUREMENT

	network/cable route					
	- Transportation of Material					
Lot 2	Design, Supply, Installation and Commissioning of a 106kWp Solar Photovoltaic inclusive of a 458kWh energy storage system in Kamarang Settlement, Region 7 as follows: <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site, n) Lightning Protection equipment integrated into the Solar PV Array and BoS System. 	To be determined by bidder	Kamarang Settlement: 5.868075°; - 60.611275°	180 days		
Lot 2	Design, Supply & Construction of an Overhead Electrical Transmission (2.8km) and Distribution (2) Network at Kamarang Settlement, Region 7: <ul style="list-style-type: none"> - Single-Phase step-up Pad/Pole mounted Transformer inclusive of all hardware and foundation works, 120 kVA, Inverter Voltage/13.8kV, 60Hz 	To be determined by bidder	Kamarang Settlement: 5.868075°; - 60.611275°	180 days		

NATIONAL PROCUREMENT
 & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<ul style="list-style-type: none"> - Single-Phase distribution Pole mounted Transformer inclusive of all hardware, 25 kVA, 13.8kV/120/240V, 60Hz (7 – 25kVA at Kamarang Settlement) - Supply and Installation of Primary and Secondary Poles (12 meters and 9 meters respectively) inclusive of all hardware. - Takeoff structure from PV Farm inclusive of pole, RCO, standoff brackets with insulators, etc. - Supply and Installation of Rural Cut-Out (100Amps) 15 kV - Supply and Stringing of Aluminum Conductor 7 Strand 1/0 AWG, Poppy for the two (2) wire MV network and all required hardware - Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) <p>Vegetation Clearing along distribution network/cable route</p> <ul style="list-style-type: none"> - Transportation of Material 				
<p>Lot 2</p>	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Issano/Tasserene, Region 7 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters 	<p>To be determined by bidder</p>	<p>Issano/Tasserene: 5.859125°; -- 59.457725°</p>	<p>180 days</p>	

NATIONAL PROCUREMENT
 & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<p>f) Batteries and Management System</p> <p>g) Web-based system energy monitoring system</p> <p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
<p>Lot 2</p>	<p>Design, Supply & Construction of a 1.82km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Issano/Tasserene, Region 7:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete 	<p>To be determined by bidder</p>	<p>Issano/Tasserene: 5.859125°; -- 59.457725°</p>	<p>180 days</p>		

	<p>Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)</p> <ul style="list-style-type: none"> - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 					
<p>Lot 2</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kaburi, Region 7 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 	<p>To be determined by bidder</p>	<p>Kaburi: 5.609672°; - 58.885991°</p>	<p>180 days</p>		

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 0.5km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kaburi, Region 7:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings
- Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)
- Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

Lot 2

To be determined by bidder

Kaburi: 5.609672°; - 58.885991°

180 days

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

Design, Supply, Installation and Commissioning of a 87.5kWp Solar Photovoltaic inclusive of a 395kWh energy storage system in Karrau, Region 7 as follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters

Lot 2

Karrau: 6.425003°; - 58.645851°

- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters
- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 0.5km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Karrau, Region 7:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings
- Supply and Installation of Complete Guy Sets (Guys are required at all End

Karrau: 6.425003°; -
58.645851°

Lot 2

APPROVED

13 MAR 2025

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**

PROCUREMENT
& TENDER ADMINISTRATION
13 MAR 2025
APPROVED

	<p>Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)</p> <ul style="list-style-type: none"> - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 2</p>	<p>a) Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Micobie, Region 8 as follows:</p> <ul style="list-style-type: none"> b) PV modules c) Ground mounting structure d) PV Inverters e) Charge Controllers (If required) f) Hybrid Inverters g) Batteries and Management System h) Web-based system energy monitoring system i) Cabling and miscellaneous components j) Grounding system and overcurrent protection devices k) Fire Extinguisher l) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) m) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 	<p>To be determined by bidder</p>	<p>Micobie: 5,351,245,- 58,971,912</p>	<p>180 days</p>	

	<p>n) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>o) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
Lot 2	<p>Design, Supply & Construction of a 1km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Micobie, Region 8:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route 	To be determined by bidder	Micobie: 5,351,245;- 58,971,912	180 Days		
Lot 2	<p>Transportation of Material</p> <p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kaibarupai, Region 8 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) 					

PROCUREMENT ADMINISTRATION
 13 MAR 2025

APPROVED

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION

13 MAR 2025

APPROVED

	<p>e) Hybrid Inverters</p> <p>f) Batteries and Management System</p> <p>g) Web-based system energy monitoring system</p> <p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>	To be determined by bidder	Kaibarupai: 5.039797°; - 59.973514°	180 days	
Lot 2	<p>Design, Supply & Construction of a 0.7km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kaibarupai, Region 8:</p> <ul style="list-style-type: none">- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network- Supply and Installation of service drops from the LV distribution network to the respective buildings	To be determined by bidder	Kaibarupai: 5.039797°; - 59.973514°	180 days	

	<ul style="list-style-type: none"> - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 					
<p>Lot 3</p>	<p>Design, Supply, Installation and Commissioning of a 46kWp Solar Photovoltaic inclusive of a 208kWh energy storage system in Shulinab, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 	<p>To be determined by bidder</p>	<p>Shulinab: 3.066200°; - 59.714750°</p>	<p>180 days</p>		

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
<p>Lot 3</p>	<p>Design, Supply & Construction of a 1.4km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Shulinb, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 	<p>To be determined by bidder</p>	<p>Shulinab: 3.066200°; - 59.714750°</p>	<p>180 days</p>		
<p>Lot 3</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Parabara, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) 					

13 MAR 2025

APPROVED

Lot 3

<p>e) Hybrid Inverters</p> <p>f) Batteries and Management System</p> <p>g) Web-based system energy monitoring system</p> <p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>	<p>To be determined by bidder</p>	<p>Parabara: 2.216667°; -59.300000°</p>	<p>180 days</p>		
<p>Design, Supply & Construction of a 0.6km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Parabara, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete 	<p>To be determined by bidder</p>	<p>Parabara: 2.216667°; -59.300000°</p>	<p>180 days</p>		

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**
 13 MAR 2025
APPROVED

<p>Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)</p> <ul style="list-style-type: none"> - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 					
<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kwatamang, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 	<p>To be determined by bidder</p>	<p>Kwatamang: 3.945417°; - 59.100253°</p>	<p>180 days</p>		

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
Lot 3	<p>Design, Supply & Construction of a 0.8km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kwatamang, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 	To be determined by bidder	Kwatamang: 3.945417°; - 59.100253°	180 Days	
	<p>a) Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Sawariwau, Region 9 as follows:</p> <p>b) PV modules</p> <p>c) Ground mounting structure</p> <p>d) PV Inverters</p>	To be determined by bidder	Sawariwau: 2.675148°; - 59.643871°	180 Days	

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION
13 MAR 2025
APPROVED

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION
13 MAR 2025
APPROVED

- e) Charge Controllers (If required)
- f) Hybrid Inverters
- g) Batteries and Management System
- h) Web-based system energy monitoring system
- i) Cabling and miscellaneous components
- j) Grounding system and overcurrent protection devices
- k) Fire Extinguisher
- l) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- m) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters
- n) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- o) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Lot 3

Design, Supply & Construction of a 0.95km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Sawariwau, Region 9:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the

To be determined by bidder

Sawariwau:
2.675148°; -
59.643871°

180 Days

respective buildings

- Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)
- Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Maruranau, Region 9 as follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters

Lot 3

To be determined by bidder

Maruranau:
2.748628°; -
59.161829°

180 Days

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
Lot 3	<p>Design, Supply & Construction of a 0.5km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Maruranau, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) <p>Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)</p> <ul style="list-style-type: none"> - Vegetation Clearing along distribution network/cable route - Transportation of Material 	To be determined by bidder	Maruranau: 2.748628°; - 59.161829°	180 Days		
Lot 3	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Potarinau, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) 	To be determined by bidder	Potarinau: 3.032330°; -- 59.766446°	180 Days		

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters
- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 0.515km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Potarinau, Region 9:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings

To be determined by bidder

Potarinau:
3.032330°; --
59.766446°

180 Days

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION

13 MAR 2025

Lot 2

APPROVED

	<ul style="list-style-type: none"> - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 					
<p>Lot 3</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Rupertee, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 	<p>To be determined by bidder</p>	<p>Rupertee: 3.976936°; - 59.124358°</p>	<p>180 Days</p>		

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
Lot 3	<p>Design, Supply & Construction of a 0.7km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Rupertee, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 	To be determined by bidder	Rupertee: 3.976936°; - 59.124358°	180 Days		
Lot 3	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Katoonarib, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) 	To be determined by bidder	Katoonarib: 2.770569°; - 59.573319°	180 Days		

PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

	<p>e) Hybrid Inverters</p> <p>f) Batteries and Management System</p> <p>g) Web-based system energy monitoring system</p> <p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
<p>Lot 3</p> <p>13 MAR 2025</p> <p>APPROVED</p>	<p>Design, Supply & Construction of a 0.5km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Katoonarib, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings 	<p>To be determined by bidder</p>	<p>Katoonarib: 2.770569°; - 59.573319°</p>	<p>180 Days</p>		

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<ul style="list-style-type: none"> - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 					
Lot 4	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kimbia, Region 10 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrd Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 	To be determined by bidder	Kimbia: 5.705369°; - 57.775383°	180 Days		

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION
13 MAR 2025
APPROVED

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**
13 MAR 2025
APPROVED

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>					
Lot 4	<p>Design, Supply & Construction of a 0.4km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kimbia, Region 10:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) <p>Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)</p> <p>Vegetation Clearing along distribution network/cable route</p> <p>Transportation of Material</p>	To be determined by bidder	Kimbia: 5.705369°; - 57.775383°	180 Days		
Lot 4	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Wikki Calcuni, Region 10 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) 	To be determined by bidder	Wikki Calcuni: 5.548688°; - 57.914884°	180 Days		

	<p>e) Hybrid Inverters</p> <p>f) Batteries and Management System</p> <p>g) Web-based system energy monitoring system</p> <p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrad Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
<p>Lot 4</p>	<p>Design, Supply & Construction of a 0.7km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Wikki Calcuni, Region 10:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings 	<p>To be determined by bidder</p>	<p>Wikki Calcuni: 5.548688°; - 57.914884°</p>	<p>180 Days</p>	

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2023
APPROVED

	<ul style="list-style-type: none"> - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 					
--	--	--	--	--	--	--

Duly authorized to sign for and on behalf of

.....

(name of Bidder)

(Full name)

(Title)

(Signature and seal)



TECHNICAL SPECIFICATIONS

1. General

The tender calling for convenient bids is dedicated to identifying and contracting a Supplier and Installer for the following services:

Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Network for Hinterland Communities in Guyana.

The minimum capacities required for the Solar Photovoltaic Systems are as follows:

No.	Region	Community	Pop.	Buildings	PV (kWp)	BESS (kWh)
Lot 1	1	Kariako	700	14	41.5	187
	1	Whitewater + Arakuru	1220	24	51	265
	2	Mashabo	548	13	41.5	187
	4	St. Cuthbert's Mission	1700	14	51	265
Lot 2	7	Kamarang Settlement	1177	42	106	458
	7	Issano/Tasserene	413	22	51	265
	7	Kaburi	550	11	41.5	187
	7	Karrau	563	10	41.5	187
	7	Karrau Secondary School, Teachers' Quarters and Police Outpost		3	46	208
	8	Micobie	650	9	51	265
	8	Kaibarupai	438	9	41.5	187
Lot 3	9	Shulinab	506	15	46	208
	9	Parabara	245	9	41.5	187
	9	Kwatomang	467	12	41.5	187
	9	Sawariwau	685	15	51	265
	9	Maruranau	876	17	51	265
	9	Potarinau	685	9	41.5	187
	9	Rupertee	374	16	41.5	187
	9	Katoonarib	420	9	41.5	187
Lot 4	10	Kimbia	350	9	41.5	187
	10	Wikki Calcuni	136	12	41.5	187
			12,703	294	1,002	4,708

Table 1: List of communities and Solar PV System Installed Capacities

The Solar PV System to be installed in Kariako will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Post (Solar PV System BESS Depleted)
2	Nursery School
3	Primary School 1
4	Primary School 2
5	Primary School 3
6	Teacher's Quarters
7	School Kitchen
8	Village Office

9	Village Market
10	Church
11	Doctor's Quarters
12	Computer Hub
13	Guesthouse (Powered by Solar PV System)
14	Cottage Hospital (located 0.8km from village centre)
15	NGO School with Dorms (Proposed)
16	Sewing Centre

The Solar PV System to be installed in White Water will be required to provide electricity to the following public buildings:

No.	Buildings
1	Polyclinic
2	Nursery School 1
3	Nursery School 2
4	Primary School 1
5	Primary School 2
6	Teacher's Quarters
7	School Kitchen 1
8	School Kitchen 2
9	Village Office/Multi-purpose Building
10	Pavilion and Floodlights
11	Medex Quarters
12	Bakery
13	Guesthouse
14	ICT Hub
15	Church 1
16	Church 2
17	Church 3
18	Agro-processing Facility (Powered by Solar PV System)
19	Sports Building
20	Police Station and Living Quarters

The Solar PV System to be installed in Mashabo will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School
4	Teacher's Quarters (2)
5	School Kitchen
6	Village Office
7	Guesthouse
8	Pavilion
9	Multipurpose Buildings
10	Eco Restaurant
11	Village Shop
12	ICT Hub (Powered via Solar PV System)

The Solar PV System to be installed in St. Cuthbert's Mission will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	School Kitchen
6	Village Office
7	Village Benab
8	Pavilion
9	Community Centre
10	Youth Centre
11	Doctors' Quarters
12	Library
13	Stores
14	Secondary School

The Solar PV System to be installed in Kamarang will be required to provide electricity to the following public buildings:

No.	Buildings
1	Malaria Center
2	Doctor's Living Quarters 1
3	Doctor's Living Quarters 2
4	Doctor's Living Quarters 3
5	Nurses' Living Quarters 1
6	Nurses' Living Quarters 2
7	Medex's Living Quarters
8	Nurses' Living Hostel
9	Operations Theatre
10	Hospital
11	Nurses' Living Quarters 3
12	Dentex's Living Quarters
13	Community Health Workers' Living Quarters
14	Hydromet Office
15	Old Police's Living Quarters
16	New Police's Living Quarters
17	Old Police's Station - used as Living Quarters
18	New Police Station
19	Amerdian Hostel
20	GECOM Office
21	Education Officer Living Quarters
22	Village Shop
23	Nursery School Kitchen
24	Village Benab
25	HM Living Quarters
26	Nursery School
27	Teachers' Living Quarters 1
28	Teachers' Living Quarters 2

29	Vice Chairman's Living Quarters
30	AREO Living Quarters/Building
31	RDC Administrative Office
32	RDC Administrative Office Annex Building
33	NAREI Office
34	GCAA Tower
35	NAREI Living Quarters
36	Department of Education Office
37	Primary School
38	Primary School Kitchen and Mess Hall
39	Sports Club
40	Multipurpose Building
41	CPCE Office
42	ICT Hub

The Solar PV System to be installed in Tasserene will be required to provide electricity to the following public buildings:

No.	Buildings
1	Police Station
2	Village Guest House
3	Teachers' Living Quarters
4	GGMC Office
5	Health Post
6	Doctors' Living Quarters
7	Nurses' Living Quarters
8	Primary School
9	School Kitchen
10	Mess Hall
11	Secondary School (Yet to be Built)
12	Tassarene church
13	Church kitchen
14	Church Mess Hall
15	Womens group center
16	Village office
17	Community Center
18	Village Shop
19	Sanitary block
20	Village Benab/Meeting hall
21	ICT Hub
22	Ball Field

The Solar PV System to be installed in Kaburi will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Post
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	School Kitchen
6	Village Office
7	Village Benab

8	Pavilion
9	Multipurpose Buildings
10	Church
11	Doctors' Quarters

The Solar PV System to be installed in Karrau will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	Village Office
6	Women's Group Building
7	Pavilion
8	Multipurpose Buildings
9	Church
10	Workshop
11	Secondary School Buildings (Proposed)
12	Police Outpost
13	Teachers' Quarters (5 Apts)

The Solar PV System to be installed in Micobie will be required to provide electricity to the following public buildings:

No.	Buildings
1	Secondary School
2	Nursery School
3	Primary School
4	Health Post
5	ICT Hub
6	Teacher's Quarters
7	Nurse's Quarters
8	Village Office
9	Multipurpose Building

The Solar PV System to be installed in Kaibarupai will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Post
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	School Kitchen
6	Village Office
7	Village Benab
8	Pavilion
9	Multipurpose Buildings

The Solar PV System to be installed in Shulinab will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School
4	Meeting Hall
5	School Kitchen
6	Village Office
7	Village Benab
8	Pavilion
9	Multipurpose Buildings
10	Youth Centre
11	Doctors' Quarters
12	Village Shop
13	Village Bond
14	Women's Group
15	Teacher's Quarters

The Solar PV System to be installed in Parabara will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Post
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	School Kitchen
6	Village Office
7	Village Benab
8	Pavilion
9	Multipurpose Buildings

The Solar PV System to be installed in Kwatamang will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	School Kitchen
6	Village Office
7	Village Benab
8	Pavilion
9	Community Centre
10	Youth Centre
11	Doctors' Quarters
12	Library

The 51.5kWp Solar PV System to be installed in Sawariwau will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School
4	Teacher's Quarters 1
5	Teacher's Quarters 2
6	Women's Group
7	Village Office
8	Village Bond
9	Pavilion
10	Community Centre
11	Resthouse
12	Water Storage
13	Guesthouse
14	Shop
15	Youth Building

The Solar PV System to be installed in Maruranau will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	Multipurpose Centre
6	Village Office
7	Village Benab
8	Hot Meals
9	Community Centre
10	Market
11	Water Storage
12	Guesthouse
13	Kitchen
14	Museum
15	Language Centre
16	Village Shop
17	Agro-processing Centre

The Solar PV System to be installed in Potarinau will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Post
2	Nursery School
3	Primary School
4	Teacher's Quarters

5	Nurse's Quarters
6	Village Office
7	Village Shop
8	Kitchen
9	Multipurpose Building

The Solar PV System to be installed in Rupertee will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Nursery School
3	Primary School 1
	Primary School 2
4	Teacher's Quarters
5	Sewing Group Building
6	School Kitchen
7	Village Office
8	Village Benab
9	Pavilion
10	Craft Centre
11	ICT Hub
12	Village Shop
13	Workshop
14	Museum

The Solar PV System to be installed in Katoonarib will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Post
2	Nursery School
3	Primary School
4	Teacher's Quarters
5	School Kitchen
6	Village Office
7	Youth Building
8	Community Centre
9	Community Pavilion

The Solar PV System to be installed in Kimbia will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Post
2	Nursery/Primary School
3	Agro-processing Facility
4	Village Store
5	School Kitchen
6	Village Office

7	Guesthouse
8	Sports Building
9	Community Centre

The 27.5kWp Solar PV System to be installed in Wikki Calcuni will be required to provide electricity to the following public buildings:

No.	Buildings
1	Health Centre
2	Health House
3	Nursery/Primary School
4	Recreational Hall
5	Teacher's Quarters
6	Village Kitchen
7	Village Office
8	Village Benab
9	Pavilion
10	Church
11	Guesthouse
12	Multipurpose Buildings

The Images of the Individual Locations and the Public Buildings can be seen in the Annexes.

- 1.2 Provide all technical documentation including user and operational manuals within your submission to the GEA. **The bidder must include all brochures, applicable certifications, technical specifications, brand, and models for ALL equipment provided in one location in their submission in the following order:**
- 1) PV Modules
 - 2) PV Array Mounting Structure
 - 3) Inverter
 - 4) Grid Interactive Inverter
 - 5) Charge Controller
 - 6) Multimode Inverter
 - 7) Battery Energy Storage System
 - 8) Battery Monitoring System
 - 9) Energy Management System (if any)
 - 10) Schematic Diagram in accordance with NEC 2017 Article 690 and NEC 705

Bidders must ensure that all equipment supplied under the contract is new, unused and of the most recent or current models, and that they incorporate all recent improvements in design and materials, unless provided otherwise in the Contract.

- 1.3 Provide three (3) years' After Sales Services to GEA. Bidders must provide a statement indicating its acceptance or otherwise of this requirement.

2. Climate and Site Conditions

Altitude	: <1000m above sea-level
Maximum daily mean temperature	: 35 °C
Maximum outdoor ambient shade temperature	: 50 °C
Minimum outdoor ambient shade temperature	: 15 °C

Maximum relative humidity	: 100%
Wind Velocity	: 18 mph
Isokeraunic level	:70
Average Number of days with Rain p.a.	:120
Average Annual rainfall, cm	:150

It is required that Bidders conduct site visits to carry out their own assessment of how the system will be installed. As practical as possible all systems shall be installed in such a way as to avoid shading of the Solar PV Array and any other obstructions that would decrease the efficiency of the system.

3. Specification of Required Hardware – Solar PV System

4.1 General Remark

The whole system must be designed in such a way that all components are resistant to the prevalent climatic and weather conditions of the specific sites, specifically in relation to corrosion resistance. Special attention should be taken in the selection of equipment in order that there is reduction/elimination of the risk of theft and vandalism. PV Array fixtures (Bolts, Nuts and Fasteners) should be installed in such a way that theft is minimised. The contractor is required to make all the necessary provisions, where applicable, for ensuring that the complete PV system is commissioned (System Operation (AC Output to all interconnected buildings and Monitoring is confirmed).

4.2 Photovoltaic Module

- All PV Modules should be manufactured in accordance with International Standards (IEC 61215, IEC 61730, IEC 61701, IEC 62716, IEC 62804, UL1703 etc.) and the National Electrical Code 2023 primarily Article 690;
- **500 watts or greater rated solar modules** totaling a minimum of the stated System Capacity for each community’s Solar PV System.
- All modules should be made of Crystalline Silicon Solar Cells with conversion efficiency not less than 20% at Standard Test Conditions.
- All PV Modules shall show the same capacity (Voc/Isc; Vmp/Imp; Wp)
- The Manufacturer must be internationally recognised and provide references and certificates on all applicable module testing
- MC4 connectors for all Modules
- 20 years warranty on Modules

4.3 Ground Mounting Structure for PV Modules

- The mounting structure is to be ground mounted (unless otherwise directed by the procuring entity).
- The PV modules mounting structure must adequately accommodate all the PV modules supplied.
- The PV array mounting structure, including modules, and balance of system components shall be designed to withstand wind loads of at least 60 mph (3-second gust).
- Array mounting hardware supplied shall be compatible with the prevalent specific site environment and weather conditions.
- Mounting structures of anodised aluminium material shall be provided. Mechanical

hardware shall be durable and corrosion resistant. The use of ferrous metals (including but not limited to painted or plated steel), dissimilar metals in contact, or any wood or plastic components is not allowed.

- Special attention shall be paid to minimising the risk of equipment damage and personal injury from exposed fasteners and sharp edges. All potentially hazardous hardware must be adequately blinded or shielded for safety.
- PV modules must be oriented in a southern direction (as far as possible) with an inclination of between 8 to 10 degrees.
- The mounting structure must be able to absorb and transfer the mechanical loads to the ground via the foundation. Thus, the foundation should adhere to the following requirements:

Foundation works

- Structural concrete @ 3000 psi or over at 28 days, using -3/4 stones with a height of not less than 16 inches.
- ½" diameter corrugated high tensile steel reinforcement or over (main bars) and 3/8" diameter steel bars as stirrups spaced at 8" crs to form a cage with a minimum of 2" concrete covers.
- *Vertically smooth finish formwork for the foundation is required.*
- Compacted sand fill of 12" or more in two layers under foundation.
- 2" thick cement/sand (1:6) mix blinding upon compacted sand fill before pouring concrete
- Array mounting hardware supplied shall be compatible with the site considerations and the environment. Mounting structures of anodized aluminium material shall be provided. Mechanical hardware shall be durable and corrosion resistant. The use of ferrous metals (including but not limited to painted or plated steel), dissimilar metals in contact, or any wood or plastic components are not allowed.

4.4 PV Inverter

- The minimum size of each Inverter shall be 10 kW and totaling between 90% to 100% of the solar array name plate capacity for all sites.
- Inverters must have a Master/Slave or String type Configuration
- **AC Grid Frequency – 60 Hz**
 - **Operating Frequency range: Frequency Range ≥ 58.4 to ≤ 61.7 (Field Selectable)**
- Certificates and Compliance with International Standards Including (UL 1741-2010, UL 1699B, IEEE 1547-2003, IEEE 1547.1-2003, ANSI/IEEE C62.41, FCC Part 15 A & B)
- Pure Sinewave output;
- High efficiency (AC) > 90% @ P/Pn (AC) = 10%;
- Protection against overcurrent and overvoltage;
- Include Surge Protection Devices (SPDs)
- Indications of status of operation (e.g. LED);
- Automatically disconnect from the exiting minigrid if required
- Capability of connecting monitoring devices;
- Ground fault monitoring / grid monitoring.
- Safety measures (EN 61000, EN 60950 and others).
- Interface to the grid (switchboard including manual disconnection device).
- 10 Years warranty

4.5 Hybrid Inverter

- Capacity totaling between 100 – 120% of PV inverters

- Master/Slave or String Type;
- Maximum efficiency of 96% with 94.5% CEC efficiency;
- Intelligent battery management including state of charge calculation for maximum battery life;
- Integrated soft start/generator support;
- Versatile - complete for off-grid management as well as grid-tie battery backup/AC Coupling;
- Suitable for systems from up to 100 kW or greater;
- Excellent overload characteristics with active temperature management;
- Certification UL 1741 / UL 1998;
- Modular, stackable design;
- Nominal Frequency 60 Hz;
- Frequency Range ≥ 58.4 to ≤ 61.7 (Field Selectable);
- Pure Sine Wave;
- Automatically transfers between inverter power and incoming AC power source;
- Compatible battery types Flooded, Gel, AGM, LiON;
- Indications of status of operation (e.g. LED);
- Over voltage and under voltage protection;
- Over-temperature protection;
- Overload protection;
- Short circuit protection.
- Features capabilities for remote system monitoring of the PV System, BESS and Inverter Parameters
- 5 Year Standard Warranty;

4.6 Charge Controller (if Applicable)

- Charge controller must be rated a minimum 25 % over PV system capacity size
- for each solar PV system
- Nominal Battery voltage: 12/24/48 V
- Maximum Power Point Tracking (MPPT) charging technology
- Charge regulation method: Three stage (bulk, absorption, float) plus manual equalization
- Available monitoring and configuration
- Supported battery types: Flooded, GEL, AGM, Custom, Li-Ion
- Compatible with any brand of PV module, any grounding method
- Stand-alone application or integration with inverter/charger system
- Certification: UL1741, CSA 107.1, EN 50178/IEC 62477-1
- 5 years warranty

4.7 Energy Storage System

- Minimum useable storage capacity should match or exceed the stated Battery Energy Storage System of each of the Community Solar PV Systems at a DOD of 50%
 - Minimum Energy Storage capacity of:

Community	BESS (kWh)
Kariako	187
Whitewater + Arakuru	265
Mashabo	187
St. Cuthbert's Mission	265
Kamarang Settlement	458
Issano/Tasserene	265
Kaburi	187
Karrau	187
Karrau Secondary School, Teachers' Quarters and Police Outpost	208
Micobie	265
Kaibarupai	187
Shulinab	208
Parabara	187
Kwatamang	187
Sawariwau	265
Maruranau	265
Potarinau	187
Rupertee	187
Katoonarib	187
Kimbia	187
Wikki Calcuni	187

- Batteries should be deep cycle type and rechargeable
 - OPzV Battery Technology
- Battery Rating: C10
- **Design for renewable energy applications specifically for hybrid/Off-Grid application**
- Batteries are to be installed as recommend by the OEM
- Batteries are to be placed on racks to minimize the use of space
- Bidders are to supply the racks which are to be supplied with the batteries and therefore suitable for use with the battery. **Racks should be made to minimize the space required for keeping the batteries in a suitable position while allowing optimum charge/discharge operation and effective ventilation. All integrated connectors and fasteners used must be resistant to rust. Racks must be painted in two coats with anti-rust protective layer paint. The preferred colour would be black. The battery racks MUST be adequately grounded.**
- Battery terminals and conductors should be guarded/shielded to prevent accidental short circuits. Guards should be removable to aid future maintenance of the battery bank.
- **System must be supplied with a suitable means of isolating the BESS from the rest of the electrical system particularly the load.**
- Bidders are to supply drawings of the racks with battery bank configuration for approval by the procuring entity
- Manufacturer's data sheets containing battery performance charts and specifications must be provided. Batteries must be procured from same manufacturer and have same ampere-Hour and voltage rating
- 5 Years Minimum Warranty on batteries

The battery energy storage system should provide the primary function of allowing the maximum use of energy stored during the periods when solar energy is not available. It should be capable of providing rapid response when the intermittent source cannot meet the energy requirement of the building. A battery management and monitoring system must be included.

4.8 Battery Monitoring System

The battery monitoring system shall be capable of (but not limited) the following:

- State of Charge (SOC), state of health (SOH) monitoring of the battery bank based on measured kWh in the battery bank (not based on battery voltage)
- Monitoring charging and discharge rates
- Monitoring (power, voltages, current, etc.)
- Battery Temperature
- These features can be integrated in the inverter
- 2 Years Warranty

4.9 Monitoring System

The installation shall provide real-time monitoring through a computer software that features a local electric energy meter, power meter, data logger and appropriate current transformers to record electric consumption of the loads/buildings from the grid and solar energy produced by the solar PV system and provide a combined recording of all inverters/circuits loads. It should provide:

- Graphical and Numerical real-time energy information and long-term reports (total voltage, frequency, intensity, active power and energy demand of the mini-grid, measured in the output of the solar PV inverter/s and the low voltage side of the transformer; total power generated and energy produced by the solar system, measured in the output of the PV inverters; total power and energy produced by other sources of energy, if any);
- Historic Data; Data export via push or pull with an open data API.
- No service contracts
- 3 years warranty
- Must have at least one (1) ethernet styled registered jack (RJ) 45 data port.
- The monitoring system shall also feature a web-based application for remote monitoring via onsite internet service.

4.10 Housing

The successful bidder is required to construct a suitable concrete building where all components, such as, ESS, charge controllers, inverters, monitoring system, and switchgears will be installed. The structure shall be outfitted with a high SEER Inverter-type AC Unit (at least 18000 BTU) to help the maintenance of the required indoor temperature and conditions to allow for maximum performance of the components installed, it shall be capable of protecting the components from unwanted conditions so as to maximize the lifespan of the system. The building must be constructed of concrete with corrugated zinc sheet roofing and PVC panel ceiling. There must also be a metal door swinging outwards to enable ease of movement of the installed components and any personnel required to conduct monitoring or repairs and maintenance. Any wooden sections of the building must be made with dressed and treated lumber.

The entire area surrounding the Solar PV System Installation must be suitably fenced using metal with concrete base or pad foundations for the uprights. This is to ensure safety of the installed equipment. Fencing must be equipped with security means (e.g. razor wiring atop the fencing) to limit unwanted access to the Solar PV System Equipment. This fenced area must

also be provided with sufficient lighting for security purposes. Lighting must be of the Integrated Solar PV Type (Solar PV Module and BESS integrated into the luminaire).

4.11 Locations

No.	Region	Community	Pop.	Buildings	PV (kWp)	BESS (kWh)
1	1	Kariako	700	14	41.5	187
2	1	Whitewater + Arakuru	1220	24	51	265
3	2	Mashabo	548	13	41.5	187
4	4	St. Cuthbert's Mission	1700	14	51	265
5	7	Kamarang Settlement	1177	42	106	458
6	7	Issano/Tasserene	413	22	51	265
7	7	Kaburi	550	11	41.5	187
8	7	Karrau	563	10	41.5	187
9	7	Karrau Secondary School, Teachers' Quarters and Police Outpost		3	46	208
10	8	Micobie	650	9	51	265
11	8	Kaibarupai	438	9	41.5	187
12	9	Shulinab	506	15	46	208
13	9	Parabara	245	9	41.5	187
14	9	Kwatamang	467	12	41.5	187
15	9	Sawariwau	685	15	51	265
16	9	Maruranau	876	17	51	265
17	9	Potarinau	685	9	41.5	187
18	9	Rupertee	374	16	41.5	187
19	9	Katoonarib	420	9	41.5	187
20	9	Katoonarib	350	9	41.5	187
21	10	Kimbia	136	12	41.5	187
	10	Wikki Calcuni	136	12	41.5	187
			12,703	294	1,002	4,708

4.12 Schematic Diagram

A detailed system schematic design layout of all components and system interconnects **MUST** be provided in accordance with NEC 2023 Article 690 and associated Articles 705, 706, 710, 110, 240 and 250.

Drawings provided **MUST** be electrical schematic drawings and show all components and their respective rating (e.g., wires and circuit breaker sizes). *An as-built electrical schematics of the systems must be submitted to the Procuring Entity for review and approval before commissioning the solar PV system.* The as-built electrical schematic must include the following:

- Solar PV Array layout
- Size of the solar modules in watts and quantity per string sizing considerations (Series and Parallel Connections)
- The direction/azimuth (deg) and the tilt (deg) of the modules in each string must be stated on the diagram
- Layout of DC combiner boxes showing electrical connections and ratings of fuses, breakers and/or disconnects.

- Model number and basic electrical specifications of major electrical components like inverters, charge controllers, battery cells, transformers, circuit breakers, disconnects, monitoring device, etc. must be included in the electrical schematics.
- The point of interconnection/s of the Solar PV System to the LV/MV Electrical Network must be clearly indicated on the drawing (PV System Mains Disconnect, Size of MV Fuses, Step-up Transformer Rating).
- The sizes of the electrical conductors for AC and DC conductors (AWG or mm² or mm) must be clearly shown on the electrical schematic.
- Grounding circuit of major electrical components and grounding electrode/s.
- The size and position of current transformers used by the solar PV monitoring system (if installed) must be included in the electrical schematic.
- The point/s where voltage and current readings are measured by the monitoring system (if installed) must also be shown in the electrical schematics. Basic specifications of the CTs must be included in the drawing.
- The point of connection of the data cable or wireless signal for the monitoring system (if installed) at the facility data network with internet access must be indicated in the electrical schematic.

The contractor is required to have a laminated copy of the system schematic installed at the location where the system components are sited before the system is commissioned.

4.13 Electrical Cables

Cables exposed to the sun should show an adequate type (UL 44, 83, UL 4703) designed to withstand harsh weather conditions (UV radiation, salty humidity etc.), e.g. type HN07-RNF and cables must be clearly identifiable (colour coded).

- Appropriate length USE-2 #6 AWG Sunlight Resistant Cable to connect solar modules in the designed configuration.
- The appropriate number of Solar Disconnect Switches and Combiner boxes.
- Appropriate size and number of interconnecting cables between combiner boxes and inverters.
- Appropriate size AC Interconnecting cables.

4.14 Protections

The solar PV system should be provided with lightning, & over voltage/over current protection. The main aim in this protection shall be to reduce the overvoltage to a tolerable value before it reaches the PV or other subsystem components. The source of over voltage can be lightning, atmosphere disturbances etc. The protection against induced high-voltages shall be provided by the use of MOV type surge arrestors and suitable earthing such that induced transients find an alternate route to earth. In addition, the lightning arrestor/SPD should also be adequately earthed for the system.

4.15 Fire Extinguisher

- Can be of type: Carbon Dioxide, Dry Chemical, Clean Agent or Dry Powder
- 20 pounds (lbs.)
- Class C rated
- Operation type (P.A.S.S)
- Test Certificate or Test Date Clearly visible

4.16 MV & LV Distribution Network

The successful bidder will be required to design and construct a new transmission and distribution network to provide power (from the PV System to be installed) to the selected buildings in the four villages. ***Guidance on the length of network and network type (LV or MV) are presented in the Delivery Schedule/Schedule of Requirements.*** The successful bidder is also required to install LV service drops to each of the listed buildings to be interconnected to the Solar PV Minigrid Systems. This is to be done, wherever possible, with guidance from the building representative/village representative/procuring entity to ensure that the cable is either connected to the building pigtail or in close proximity (within 4 feet) of the location of the building mains (or indicated position where no mains exists). while the executing agency will be responsible for the termination of these service drops.

The bidder shall provide in their bids a preliminary one-line diagram with the design/route of the distribution network to be built in both Villages. The successful bidder will be required to submit a final design after the commencement order is issued. The approval of the final design will be based on a review by the contracting agency (GEA).

The works for the distribution networks to be built in the four hinterland communities shall include:

- Supply and installation of Single-Phase step-up Pad or Pole mounted Transformer (1 per village in which an MV network is recommended) inclusive of all hardware and foundation works. Each transformer shall have the required kVA (***based on Inverter Continuous AC Output Rating times at least 1.25***) rating (given in technical specifications table), Inverter Voltage/13.8kV, 60Hz
- Supply and installation of distribution Pole mounted Transformers inclusive of all hardware. Each transformer shall have the appropriate ratings as given in the technical specifications, 13.8kV/120/240V, 60Hz
- Supply and Installation of Primary and Secondary Poles (12 meters and 9 meters respectively) inclusive of all hardware. The quantities will be based on the network design and layout.
- Takeoff structure from PV Farm inclusive of pole, RCO, standoff brackets with insulators, etc.
- Supply and Installation of Rural Cut-Out (100Amps) 15 kV on the HV side of all transformers.
- Supply and Installation of 18 kV Lightning Arresters on the HV side of all transformers.
- Supply and Stringing of Aluminum Conductor 7 Strand 1/0 AWG, Poppy for MV network and all required hardware and based on the design proposed by the bidder.
- Supply and Stringing of Aluminum Triplex Conductor 19 strands 4/0 AWG Lepas and all required hardware for LV Distribution network to the public buildings identified in both villages based on the design proposed by the bidder.
- Supply and Installation of service drops from the LV distribution network to the respective buildings in both villages

- Supply and Installation of Complete Guy Sets based on the design proposed by the bidder.
- Installation of Earth Sets
- Vegetation Clearing

4.16..1 Pad/Pole Mounted Transformer (If Applicable)

- Single-Phase Step-up transformer, 60Hz
- kVA rating will be based on a factor of at least 1.5 times the Solar PV Inverter Continuous AC Output Rating kW Capacity at each site
- Secondary Voltage (where applicable): Compatible with Hybrid Inverter output
- Primary Side Voltage: 13.8 kV
 - Tolerance on the voltage ratio shall be $\geq \pm 0.5\%$;
- The Transformer shall be capable of supplying a continuous load equal to its kVA rating, under the following conditions:
 - the rated secondary voltage held constant by increasing the primary voltage to allow for regulation at all tap positions;
 - constant flux regulation;
 - continuous steady load;
 - design maximum ambient air temperature of 40°C;
 - 65°C average winding temperature rise and 80°C hot spot temperature rise
 - 65°C temperature rise of the insulating oil measured near the top of the tank.
- The transformer may be overloaded during emergency up to 150% of its continuous rating in accordance with IEC Publication 354. Bushings, tap changer and other current-carrying parts shall also be designed for this condition
- Transformer Core and Windings: The core shall be constructed from high grade, non-ageing, cold rolled grain-oriented silicon steel laminations or superior material. The design shall avoid the presence of pockets that would prevent the complete emptying of the tank through the drain plug. The winding insulation shall be free from insulating compounds that are liable to soften, ooze out, shrink or collapse. It shall be non-catalytic and chemically inert in transformer oil during normal service. The windings and connections are to be braced to withstand shocks during transport, switching, short circuit or other transient conditions. The windings shall be uniformly insulated, and the LV neutral points shall be insulated for full voltage. The windings conductor (both primary and secondary) shall be of **electrolytic copper** to give the optimum economic design.
- Taps shall be provided in the high voltage winding, two 2.5% taps above and below primary rating. Tap changing shall be carried out with the transformer off circuit and the tap changing handle shall be external to the transformer tank. The operating handle shall have provision for padlocking and shall give visual indication of the tap position without unlocking. Each tap-changer position and the tap voltage or percentage associated with it shall be clearly identifiable by reference to nameplate information. All positions of the tap changer shall be operative positions.
- Bushings & Terminations: Bushings shall be of the outdoor type and easily replaceable. All bushings shall have a minimum creepage distance of 20mm/kV for maximum phase to phase system voltage, and shall have a continuous rating of 200% of the transformer rating. Transformers shall have two high voltage bushings for connection of the phases. Three or four LV bushings shall be provided for the connection of the phases and a neutral. High Voltage and Low Voltage bushings shall be sized in accordance with ANSI standard.
- Earthing Terminals: Transformer shall be provided with two earthing terminals comprising an M12 ISO metric bolt and nut that shall be non-ferrous. It shall include a spring washer

and a lock washer. External connecting strip between earthing terminal and neutral bushing(s) is not required.

- The transformer shall be capable of withstanding the thermal and dynamic effects of short circuits, as stated in the standards.
- The transformer shall be capable of withstanding for 2 seconds a bolted metallic short circuit on the terminals of either winding with rated voltage on the other winding and the tap-changer in any position.
- The transformer shall be equipped with lightning arrestors, with each arrestor electrically connected to each HV bushing and mechanically secured onto the tank. The lightning arrestors shall be capable of discharging lightning and switching surges and temporary power frequency over voltages. The Arrestors shall be capable of withstanding Maximum Continuous Operating Voltages (M.C.O.V) and rated for operation in 15 kV class distribution system. These arrestors shall be of Heavy Duty, Station Class / Distribution Class and Gapless Zinc Oxide type and shall be hermetically sealed units suitable for outdoor installation and mounting on distribution transformers. Additionally, the arrestors shall be suitable for heavily polluted atmospheric conditions with high incidences of lightning strikes.
- If short circuit tests have been carried out on the particular design of transformer offered, the test results shall be supplied with the bid.
- The flux density at any point of the magnetic circuit when the transformer is connected on the centre tap and operating at normal voltage and frequency shall be stated and shall not exceed 1.7 Tesla. The transformer must be capable of operating at 10% over voltage at 97% of rated frequency without saturation occurring or the flux density exceeding 1.9 tesla.
- The guaranteed impedance voltage measured at 75⁰C and at rated voltage shall not exceed 5%.
- Dielectric fluid: Oil/Dimethyl Silicone/Mineral Oil
- Certification: IEEE Std C57.12.28, IEEE Std C57.12.3
- Outdoor rated: NEMA 3R or 4X
- Standard: IEC, ANSI

The following insulation levels and dielectric tests shall apply:

Transformer insulation level

	HV Winding	LV Winding
Basic Impulse Insulation Level (kV)	95	-
Power Frequency voltage withstand level, Dry One-Minute (kV)	34	-
Power Frequency voltage withstand level, Wet 10-Second (kV)	30	10

- Manufacturer MUST be certified to a recognized Quality Management and Quality Assurance Standards such as ISO 9001 or ISO 9002, such certification shall be submitted as part of the bid documentation
- Except where modified by this specification, the transformer shall be designed, manufactured and tested in accordance with the latest editions of the following standards:

ANSI/IEC	Subject
ANSI C57.12.20	Overhead-type distribution transformers
ANSI C57.12.90	Test Code for Distribution transformers
ANSI C76.1	Test Code for Outdoor Apparatus Bushings
IEC 71	Insulation Coordination.
IEC 76	Power Transformers.

ANSI/IEC	Subject
ANSI C57.12.20	Overhead-type distribution transformers
ANSI C57.12.90	Test Code for Distribution transformers
ANSI C76.1	Test Code for Outdoor Apparatus Bushings
IEC 137	Bushings for Alternating Voltages above 1000 V.
IEC 156	Method of determining Electric Strength of Insulating Oils.
IEC 354	Loading Guide for oil immersed Transformers
IEC 437	Radio Influence Voltage Measurement.
IEC 551	Determination of Transformer and Reactor Sound Levels.
IEC 616	Terminal and Tapping markings for power transformers.
IEC 722	Guide to the Lightning and Switching impulse testing of Power Transformers and Reactors.

In case of conflict, the order of precedence shall be:

- This Specification
- ANSI Standards
- IEC Standards
- Other Standards
- The transformer shall be provided with an anodized aluminium laser engraved nameplate, in accordance with IEEE C57.12, Table 9 - Nameplate C. The following attributes should be indicated on the aforementioned nameplate: type of transformer;
 - standard to which it is manufactured and tested;
 - manufacturer's name;
 - transformer serial number;
 - year of manufacture;
 - rated frequency in Hz;
 - rated voltages (primary and secondary);
 - number of phases;
 - rated power in kVA;
 - identification of internally mounted protective devices;
 - type of cooling (ONAN);
 - rated currents in A;
 - polarity;
 - chopped wave (short time) impulse voltage withstand level in kV;
 - power frequency withstand voltage in kV;
 - percentage impedance at 85°C;
 - load loss in kW at rated current;
 - no-load loss in kW at rated voltage and frequency;
 - continuous ambient temperature at which ratings apply in degree C (40);
 - top oil and winding temperature rise at rated load in degree C;
 - winding connection diagram;
 - total weight (core, windings and oil) in kg;
 - weight of core and windings in kg;
 - volume of oil in litres;
 - oil with less than 2ppm of PCB; and
 - name of the Procuring Entity (Cooperative Republic of Guyana.)
- 2 years warranty

The Bidder must submit complete technical data sheet, descriptive literature giving full technical details of the transformer offered, outline dimension drawing and general arrangement drawing showing component layout and general schematic diagrams, and sample routine and type test reports for the type and rating of transformer.

4.16..2 Pole Mounted Transformer

- Style: Pole Mount
- Single Phase Step-down transformer
- The nominal primary voltage for the transformer shall be 13.8kV and the secondary voltages shall be 120/240V single phase three wire (13.8kVac – 120/240Vac, 60hz)
 - Tolerance on the voltage ratio shall be $\geq \pm 0.5\%$;

Taps shall be provided in the high voltage winding, two 2.5% taps above and below primary rating;

Tap changing and the tap changing mechanism shall have the following characteristics:

- tap changing shall be carried out with the transformer off circuit;
- tap changing handle shall be external to the transformer tank;
- tap positions shall be numbered as follows:

Tap 1	+ 5 %
Tap 2	+ 2.5%
Tap 3	0% (Principal Tap)
Tap 4	- 2.5 %
Tap 5	- 5.0 %

The operating handle shall have provision for padlocking and shall give visual indication of the tap position without unlocking.

Each tap-changer position and the tap voltage or percentage associated with it shall be clearly identifiable by reference to nameplate information. All positions of the tap changer shall be operative positions.

Tap change handles shall be fitted with gasketed covers, so that sealing of the transformer under normal conditions is independent of the switch shaft gland.


- The bidder shall state the percentage regulation at full load, power factor 1.0 and at full load power factor 0.85 lagging. The primary voltage variation is based on a winding temperature of 85degree C.
- Winding material: Aluminium/Copper
- Dielectric fluid: Oil/Dimethyl Silicone/Mineral Oil
- Certification: IEEE Std C57.12.20-2017
- Outdoor rated: NEMA 3R or 4X
- Tank Construction: The tank shall be of sealed construction. Transformers of the sealed type shall have tanks of rigid construction and be capable of withstanding the required internal pressures without deformation up to the maximum overload and short circuit conditions at maximum ambient temperature. The interior of the tank shall be sealed from the atmosphere, the gas plus oil volume remaining constant. The transformer shall remain effectively sealed for a top oil temperature range of minus 5°C to plus 105 °C. Transformer tanks shall be designed so that the completed transformer can be lifted and transported without permanent deformation or oil leakage. All sealing washers/gaskets shall be made of oil and heat resistant nitrile rubber or neoprene bonded cork seals suitable for temperature as stipulated in this specification. Surfaces at gasketed joints shall be such that an even face is presented to the gasket, thereby eliminating the necessity for the gasket to take up surface irregularities.
- Fittings: The following fittings shall be provided;
 - rating, diagram and terminal marking plate
 - tank grounding terminal
 - lifting lugs
 - manual pressure relief device
 - drain/sampling valve with plug
- Transformer Oil: The transformers shall be supplied filled with class 1 mineral oil conforming to IEC 296 or equivalent. The complete first filling shall be of new oil free from inhibitors and additives. The dielectric strength of the oil shall not be less than

60kV. If an anti-oxidant inhibitor is recommended, its use shall be subject to the Purchaser's approval.

- Each transformer shall be provided with a rating plate of weatherproof material showing the following items indelibly marked:
 - type of transformer;
 - standard to which it is manufactured and tested;
 - manufacturer's name;
 - transformer serial number;
 - year of manufacture;
 - rated frequency in Hz;
 - rated voltages (primary and secondary);
 - Number of phases;
 - rated power in kVA;
 - identification of internally mounted protective devices;
 - type of cooling (ONAN);
 - rated currents in A;
 - polarity;
 - chopped wave (short time) impulse voltage withstand level in kV;
 - power frequency withstand voltage in kV;
 - impedance voltage at rated current and frequency in percentage;
 - load loss in kW at rated current;
 - no-load loss in kW at rated voltage and frequency;
 - continuous ambient temperature at which ratings apply in degree C (40);
 - top oil and winding temperature rise at rated load in degree C;
 - winding connection diagram;
 - total weight in kg;
 - volume of oil in litres;
 - weight of core and windings in kg; and
 - name of the purchaser (Cooperative Republic of Guyana.)
- Standard: IEC, ANSI
- 18 months Warranty
- The Bidder will submit complete technical data sheet, descriptive literature giving full technical details of the transformer offered, outline dimension drawing and general arrangement drawing showing component layout and general schematic diagrams, and sample routine and type test reports for the type and rating of transformer.

4.16..3 Lightning Arresters

- The arresters shall be fully compliant with ANSI/IEEE C62.11 Standard and be fitted with mounting brackets. The arresters shall be similar to that shown in the diagram below. It shall be the metal oxide surge arrester type.

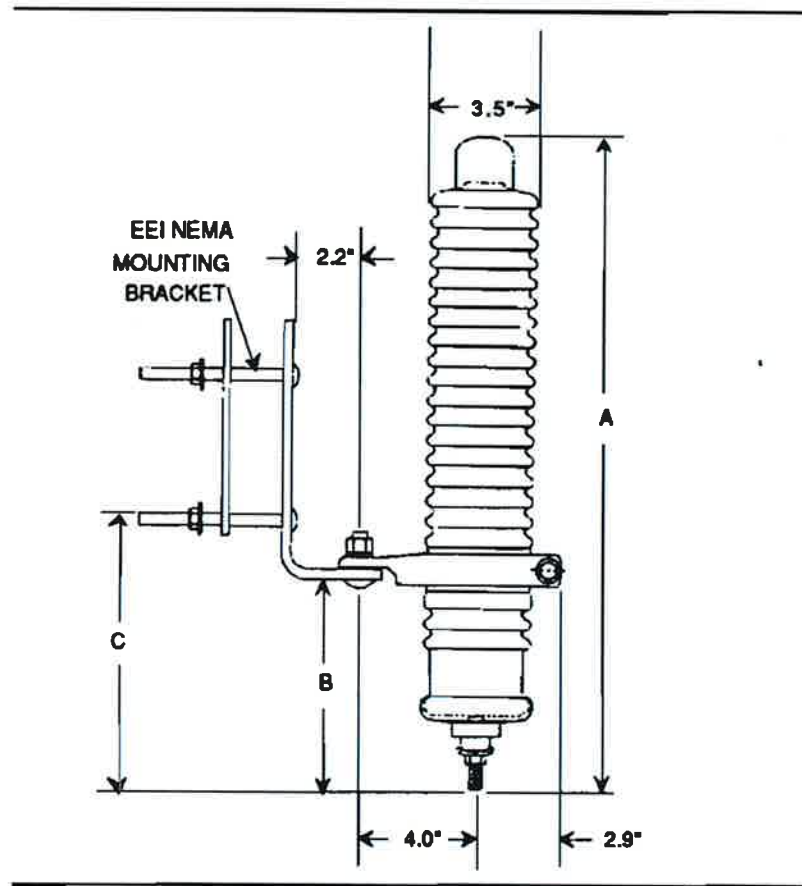

Arrester Rating	MCOV	Front-of-Wave Protection Level ¹	Maximum Discharge Voltage 8/20 μ s Current Wave						Switching Surge ²
			kV rms	kV rms	kV crest	1.5 kA	3 kA	5 kA	
18	15.3	64.2	49.1	52.1	55.1	60	67.6	81.4	44.1

5. Specification of Required Services

5.1 Systems Design

Bidders are required to visit the selected sites and determine the best possible locations for components and the complete system.

The successful bidder shall be required to provide all necessary infrastructure for mounting/positioning the inverters, controllers, energy storage system, switch gears, etc. The successful bidder shall be required to construct/provide all necessary infrastructure to accommodate the inverters, controllers, energy storage system, switch gears etc. All infrastructure constructed must be structurally sound, secure and provide protection and adequate ventilation/cooling for the equipment installed.

Detailed design drawings of the solar PV and BESS system will be required from the contractor for review and approval by the procuring entity before commencement of construction. As-

¹ Based on a 10 kA current impulse that results in a discharge voltage cresting in 0.5 μ s.

² 45-60 μ s rise time 500 A surge.

Built drawings in both hard and soft copies are required by the procuring entity before the system is commissioned.

5.2 System Operation

- a) The system must be configured in an AC or DC coupled configuration or a combination of the two. The solar PV system shall be the primary source of energy for the selected buildings.
- b) Electricity generated from the PV arrays shall be used for real-time consumption, and recharging of the battery energy storage system (BESS).
- c) The battery energy storage system should provide the primary function of allowing the maximum use of energy stored during the periods when solar energy is not available (at nights). It should be capable of providing rapid response when the intermittent source cannot meet the energy requirement of the consumers.
- d) The PV system must be capable of automatically disconnecting the load at a predefined critical SOC of the BESS. The system must also be capable of automatically recharging the BESS from the solar array to a predefined SOC before the load is automatically reconnected. These predefined SOC values must be selectable or adjustable by the operator.

5.3 Solar Photovoltaic System Installation

- a) All installations are to be conducted in accordance with **NEC 2017 Article 690** which covers solar PV systems installation, protection (AC, DC and lightning) and grounding, Chapter 3 of the NEC 2017 which covers wiring method and materials, and **Article 705** for interconnection to the grid. **All labels/ markings are to be provided by the contactor in accordance with the NEC 2017 Article 690 requirements.**
- b) The Government Electrical Inspectorate (GEI) requires that all solar installations must be provided with effective independent grounding/earthing systems. The contractor is therefore required to install a separate grounding system that when tested has ground resistance value of 25 ohms or less. The minimum size copper grounding rod to be use is 5/8inch x 8 feet for the solar PV installation. Bidder should take note of areas with high ground resistance and make provisions for special grounding methods to meet requirements.
- c) *The GEI also requires that the contractor applies and pay for an independent inspection certificate of all completed installations. This inspection certificate is required by the GEA before a final completion certificate could be issued.*
- d) Damages to internal and external walls e.g. any holes, cuts or any actions/activities resulting in the defacing of any building during installation, must be repaired (neatly covered with appropriate moulding, paint or filling material) and returned to the original state at the expense of the contractor.
- e) All the modules in a string must have the same azimuth and tilt. If strings are connected in parallel, the strings must contain the same number of modules and have the same azimuth and tilt to reduce losses due to module mismatch.

- f) If multiple strings are connected to the same MPPT input of a charge controller or inverter, each string must be identical (number and type of modules, and orientation) to reduce losses due to module mismatch.

5.4 Installation (Electrical Distribution Network)

The bidder is required to supply all materials, specialized equipment and construct an overhead medium voltage distribution network and an associated 120/240 volts, three wire (3W), single phase, bundled conductors, overhead low voltage distribution network at both villages. This overhead distribution network will be connected to the Solar PV plant to power the selected public buildings **ONLY** in both villages identified in the tender.

- (a) All works must be in accordance with the NESC and confirm to standard overhead line construction guidelines and practices.
- (b) Sag and Tension of all conductors must confirm to standard overhead line construction guidelines and practices.
- (c) All poles must be treated and can be of wallaba type, concrete or any wood local to the area (MUST have similar properties with woods used for transmission and distribution poles) e.g., bullet wood;
- (d) All crossarms must be treated Purpleheart type;
- (e) All medium voltage and low voltage insulated power cable utilized must be aluminium conductor.
- (f) All works will be subjected to inspections by an Authorized Personnel.
- (g) Approved Contractor must have previous experience in design/construction/installation of Overhead Distribution Lines.
- (h) The contractor is expected to supply and install the associated concrete plinth, fence, and cables for both low voltage side from the Solar PV plant and medium voltage side to the 13.8 kV take-off structure.
- (i) Test and commission completed overhead distribution network after construction.

5.5 System Conditions

The following conditions MUST apply to the 13.8kV network.

Frequency	60 Hz	
Nominal system voltages:	13.8 kV	
	LV System (1ph)	120/240 V
Maximum system voltages:	13.8 kV System	14.5 kV
Nominal short circuit levels:	13.8 kV System	16 kA
Insulation Levels 1qz		
Basic Insulation Level (BIL)	13.8 kV System	95 kV
Power frequency one minute withstand	13.8kV System	34 kV
Neutral earthing arrangements:	13.8 kV System	Delta connected (Not solidly grounded)
	LV System	solidly earthed

5.6 Overhead Lines

Wherever other lines and/or equipment are sharing the same poles as the electricity lines,

utmost care must be taken to avoid damage to property. The Contractor shall be responsible for any damage that may occur. It is advisable that the Contractor co-ordinates his activities with the relevant representative of the village prior to and during construction.

5.6.1 Pegging

The Contractor shall peg the pole positions to ensure that the line route is according to their proposed design. A sighting procedure shall be followed to establish straight lines. Normally poles shall be aligned by "eye" using ranging rods. Where the range is too long for the naked eye a theodolite shall be used. The pegging exercise shall be witnessed by the Employer's representative.

5.6.2 Pole Distribution

In distributing the poles, large, choice, close-grained poles shall be used for transformers, dead-end, angle, and corner poles.

5.6.3 Pole Setting

The minimum depth for setting poles shall be as follows:

Length of Poles (feet)	Setting in soil (feet)
30	5.5
40	6.0
45	6.5
50	7.0

"Setting in Soil" specifications shall apply as follows:

- a. Where poles are to be set in soil.
- b. Where there is a layer of soil of more than two (2) feet in depth over solid rock.
- c. Where the hole in solid rock is not substantially vertical or the diameter of the hole at the surface of the rock exceeds approximately twice the diameter of the pole at the same level.

On sloping ground, the depth of the hole shall always be measured from the low side of the hole.

Poles shall be set so that alternate crossarm gains face in opposite direction, except at terminals and dead-ends where the gains of the last two poles shall be on the said side facing the terminal or dead-end.

On unusually long spans, the poles shall be set so that the crossarms are fixed on the side of the pole away from the long span. Where pole op pins are used, they shall be on the opposite side of the pole from the gain, with the flat side against the pole.

Poles shall be set in alignment and plumb except at corners, terminals, angles, junction, or other point of strain, where they shall be set and raked against the strain so the conductors shall be in line.

Poles shall be raked against the conductor strain not less than one inch for each ten feet of pole length nor more than two inches for each ten feet of pole length after conductors are installed at the required tension.

Poles backfill shall be placed as soon as possible after pole erection in layers not exceeding six inches. Each layer shall be evenly placed and thoroughly compacted. Backfill in shall be built up to a minimum of 12" above the surface of the general ground level to allow for consolidation and settlement.

Should excavation be to a greater depth than specified, use sand compacted in 3" deep layers to bring the excavation to the required elevation.

Backfill material shall be sand or other suitable soil when excavated material is considered unsuitable. This material shall be free of leaves, wood and other deleterious matter.

Transformer poles shall also be fitted with one sleeper at ground level (5ft. sleeper). Sleepers shall be bolted to the pole.

In exceptionally wet ground conditions poles may require top and bottom sleepers.

5.6.4 Preparation of Poles and Assembly

Poles (supplied undrilled) shall be gained and drilled. All bolt holes shall be 1/16" larger than the diameter of the bolts. (The correct lengths of bolts as required to match the various sizes of poles shall be used for all connections).

Pole butts shall be coated with an approved mix of tar, oil and creosote, unless otherwise specified, which shall be applied hot from the butt to a point 8 feet above the butt. The roof shall be painted with the same mixture.

Poles should be roofed, drilled, and dressed at the pole dump sites. A power drill should be used to drill the holes efficiently.

Pole steps are to be located 18" apart. Pole steps in the vicinity of the lowest conductor shall be removed after work is completed.

5.7 Grading of Line

When using high poles to clear obstacles such as buildings, foreign wire crossings, wide roads, etc., there shall be no upstrain on pin-type insulators in grading the line each way to lower poles.

5.8 Guys and Anchors

Guys shall be placed before the conductors are strung and shall be attached to the pole.

All anchors and rods shall be in line with the strain and shall be so installed that approximately six inches of the rod remain out of the ground. In cultivated fields or other locations, as deemed necessary, the projection of the anchor rod above earth may be increased to a maximum of 12 inches to prevent burial of the rod eye. The backfill of all anchor holes must be thoroughly tamped the full depth, and the first 3 feet shall be placed in four well compacted layers of 8" each.

- Anchor blocks shall be 5ft. long.
- Preformed wraps shall be used to fix the guy wire.

5.9 Locknuts

A locknut shall be installed with each nut, eye-nut or other fastener on all bolts or threaded hardware such as insulator pins, upset bolts, double arming bolts, etc., unless otherwise specified.

When installed in the structure, they shall extend at least 1/2" and not more than 2 1/2" beyond the nuts.

5.10 Insulators

Extreme care must be exercised in the distribution, storing and handling of insulators and special precautions taken to prevent chipping or cracking of the discs. Any damage to the insulators caused by the contractors' negligence must be made good by him.

Ball sockets of suspension insulators must be clean inside and free from dust, small stones, etc. before the ball is inserted. The ball shall be prevented from leaving the socket by the insertion of a cotter pin and the ends of all cotter pins shall be spread 1" apart after insertion to prevent their falling out under working conditions.

Pin insulators shall be tight on pins and on target construction, the top groove must be in line with the conductor after tying in. The conductors shall be tied in the top groove of the insulator on tangent poles and on the side of the insulator away from the strain at angles. Polymeric insulators shall be used for conductor dead-end.

5.11 Conductors

Conductors must be handled with care. Conductors shall not be trampled on nor run over by vehicles. Each reel shall be examined and the wire shall be inspected for cuts, kinks, or other damage. Damaged portions shall be cut out and the conductor spliced. The conductors shall be pulled over suitable rollers or stringing blocks properly mounted on pole or crossarm if necessary, to prevent binding while stringing.

Loading of conductor drums may be performed by a small mobile crane or fork lift. Drums may only be rolled over short distances and must always be rolled in the direction of rotation corresponding with the arrow on the drum.

Drums are not to be dropped from lorries. Any conductor damaged by such mishandling may be rejected by the Engineer and the landed cost of replacement charged to the Contractor. The lagging on the drums is to be retained until the drums are finally mounted on spindles prior to pull out.

In pulling out conductor the drum shall be supported on suitable jacks levelled and secured with the drum free to revolve. An efficient brake shall be provided to prevent the conductor jumping the drum when pulling ceases. Where convenient, the conductor may be pulled by a towing vehicle to give slack. The conductor shall be lifted by approved means, e.g., a lifting shoe and placed through the above-mentioned stringing blocks.

During pull out, the conductor is to be prevented from rubbing on hard abrasive surfaces. Temporary scaffolding may be required to scale steel fences and other abrasive objects along the route. Special structures such as temporary poles will be needed to gain clearance at road crossing and navigable waterways as well as existing high voltage wires. Proposals for these crossings must be worked out well in advance and must be approved by the Engineer. During work on such crossings the Engineer will be in attendance and his instructions relating to safety must be adhered to.

In cases where circuits to be crossed can be switched out, the permit to work system will be in force. The Contractor shall be required to obtain written clearance from the Engineer before assuming the circuits are dead.

Wherever possible the conductor must be kept clear of water.

If conductors are damaged beyond repair because of the Contractor's equipment, methods or

lack of adequate protection, the damaged section shall be removed and replaced at the expense of the Contractor.

With pin-type insulators the conductors shall be tied in the top groove of the insulator on tangent poles and on the side of the insulator away from the strain at angles. Pin-type insulators shall be tight on the pins and on tangent construction the top groove must be in line with the conductor after tying in.

For neutral and secondary conductors on poles, insulated brackets may be substituted for the single and double upset bolts on angles of 0 to 5 degrees in locations known to be subject to considerable conductor vibration.

All conductors shall be cleaned thoroughly by wire brushing before splicing or the installation of a connector or clamp. A suitable inhibitor shall be used before splicing or applying connectors over aluminium conductor.

5.12 Splices and Dead Ends

In exceptional circumstances conductors may be spliced using a crimped connector. Dead-ends shall be fitted with preformed wraps. There shall be not more than one splice per conductor in any span and splicing sleeves shall be located at least ten feet from the conductor support. No splices shall be used in spans adjacent to section poles, nor in spans of road, railway lines nor in spans of any important crossing.

5.13 Connectors

All connections shall be made using crimped connectors, type Burndy or equivalent.

5.14 Line Clearance to Ground

The minimum line clearances to ground for voltages from 750V to 15kV shall be in accordance with the table below.

Situation	Min. Clearances Metres (Feet)
Over Open Country	4.60 (15)
Over a Road	7.5 (25)
Along A Road	7 (23)
Over Telecommunications Lines	2 (6)
Over Rivers	7.5 (25)
Over Railways	8.6 (28)
Over LV Lines	2 (6)
Near Buildings: Vertical* (roof or projection not accessible to pedestrians)	3 (10)
Near Buildings: Vertical* (roof or balconies accessible to pedestrians)	4.6 (15)
Horizontal	2.4 (8)

5.15 Sagging

The sag of the conductors shall be determined in the field from the span length, the section ruling span, the temperature and the sag charts supplied by the Engineer. Sag measurements shall be made on one principal sighting span and up to two check spans for any sag section. These spans and the respective sags will normally be agreed upon beforehand with the Project

Manager.

All conductors shall be sagged evenly, except that a maximum increase of three inches of the specified sag in any span will be acceptable. However, under no circumstances will a decrease in the specified sag be allowed.

The work includes stringing and sagging of conductors and the installation of all joints, assemblies and terminals. The entire operation will be observed by the Engineer or his representative and every facility shall be given the observer or engineer to thoroughly inspect every detail of the work. The equipment used for the operation shall be such that the conductors are not pinched, twisted or damaged in any way.

For pulling out and subsequent sagging, the conductors shall be supported in approved stringing blocks, having close fitting but free running aluminium sheaves on roller bearings. These blocks shall be so attached to the structure that they are at the same height as the conductor groove on the insulator.

During stringing/sagging operations, the contractor must ensure that undue stresses are not imposed on the structures or insulators. At no time during pull out and prior to sagging should the tension in the conductor be greater than 50% of its ultimate tensile strength nor should the sag be less than 80% of respective sag for any specific span.

The Contractor shall not use tangent poles as temporary dead ends unless suitably back-guyed. At no time shall the conductor be held in tension by pin insulators.

The Contractor shall have in operation a suitably clear and reliable means of communication between check spans, sighting spans, conductor anchor points and conductors tensioning point throughout the sagging and tensioning exercise. It shall preferably be portable radios, but if not available, flags may be used.

The following are the typical tools/equipment required:-

- Chain jack
- Conductor grips
- Conductor travellers
- Drum jacks
- Tractor with winch

However, the tools/equipment should not be limited to any or all of the above. For long lines use tractor for pulling, preferably all three (3) conductors simultaneously. Use light rope as pilot especially when pulling over the lines on difficult terrain. Ensure conductor on rollers at each support to minimise abrasion and friction, also to prevent loops and kinks. Alternatively, tractor may be used with capstan attached to wheel. This method ensures adequate coiling up of rope.

Pull up and tensioning shall follow the sequence below.

- a) first pull up by vehicle
- b) next - further tensioning by winch
- c) final tensioning by chain jack at pole top
- d) tension - two outer conductors simultaneously
- e) adjust temporarily to allow structures to lean forward by approximately 2" to compensate for tensioning in succeeding (adjacent) section
- f) final adjustment to sag
 - a. select longest flat span in section (also) two other spans at opposite extremities if the section is longer than 500 metres;
 - b. use light boards to pull up conductors to correct sag;
 - c. after correct sag, mark conductor for permanent clamp position, apply Armour Tape and tie off.

The following line checks shall be carried out.

- a) final pole depths use 10' mark as gauge
- b) balance loading on stays
- c) damaged insulators
- d) clearances
 - a. ground
 - b. buildings
 - c. other circuits

5.16 Secondaries and Service Drops

Secondaries and service drops shall be so installed as not to obstruct climbing space. There shall not be more than one splice per conductor in any span, and spicing sleeves shall be located at least ten feet from the conductor support. Where the same covered conductors or service cables are to be used for the secondary and service drop, they may be installed in one continuous run.

5.17 Earthing/Grounding

The following parts of the system are to be grounded:

- Common neutral wire.
- Neutral at consumer's services entrance.
- Transformer windings as specified.
- Tank or frame of transformers, metering equipment, capacitors, regulators and other line equipment.
- Steel platforms and beams in substation or on poles.
- Fencing including gates used to enclose transformer or capacitor installations.
- Cable sheaths.
- GOAB switch handles.

Ground rods shall be driven full length in undisturbed earth. The top shall be at least 12 inches below the surface of the earth. The ground wire shall be attached to the rod with a clamp and secured to the pole with staples. The staples on the ground wire shall be spaced two feet apart except for a distance of eight feet above the ground and eight feet down from the top of the pole where they shall be six inches apart.

All equipment shall have at least two connections from the frame, case or tank to the multi-grounded neutral conductor.

The equipment ground, neutral wires, and lightning-protective equipment shall be interconnected and attached to a common ground wire.

Temporary earths for the purpose of construction work shall be installed in accordance with standard practice, on both sides of the work area and at a reasonable distance away, so as to provide safe protection against lightning strikes or accidental energising of line or any other electrical hazard, to any personnel during construction.

5.18 Bolts and washers

All bolts and washers should be hot-dipped galvanized.

5.19 Rural Cut-outs (RCO)

RCOs for transformer structures should be combination type (lightning arrester included).

5.20 Clearing of Right-of-Way (RoW)

In preparing the right-of-way, trees shall be removed, underbrush cleared and trees trimmed so that the RoW shall be clear from the ground up and of the width required.

Trees fronting each side of the RoW shall be trimmed symmetrically unless otherwise specified. Dead trees beyond the RoW which would strike the line in falling and which would require topping if not removed, shall either be removed or topped except that shade, fruit, or ornamental trees shall be trimmed and not removed unless otherwise authorised.

Spraying shall be performed in such manner, at such pressure and under such wind conditions that drift of spray material to adjacent vegetation will be avoided. Spraying should be performed the same day that brush and tree cutting removal work is completed but in no event later than 72 hours from the time tree cutting is performed. If moisture or wind conditions prevent treatment in accordance with the above, spraying shall be performed as soon thereafter as possible.

5.21 Safety

The work shall be carried out with every reasonable precaution and provisions being taken for the safety of those concerned in the preparation, excavation, erection, stringing and all other operations as well as for persons in the vicinity.

5.22 Inspection and Testing

Inspection and testing shall conform to the Quality Assurance requirements of this Specification. The Contractor shall inspect the Works prior to testing to ensure compliance with the specified requirements and the drawings. The inspection of the Works shall be attended and witnessed by the procuring entity or representative.

5.23 Drawing and Records

The Contractor will develop the drawings, both layouts and detail guides, required by the Procuring Entity for the construction of the Works. The Procuring Entity will review and approve the drawings in before construction commences.

5.24 Compliance with Regulations

All the equipment and accessories shall comply in every respect with the Regulations and Acts in force in Guyana.

The equipment and connections shall be designed and arranged to minimize the risk of fire and any damage that might be caused in the event of fire.

To ensure that the Works are in accordance with the Specification, with the regulations and with relevant authorised international standards, the Contractor shall have in place suitable Quality Assurance Programmes and Procedures to ensure that all activities are being controlled as necessary.

The quality assurance arrangements shall conform preferably to the relevant requirements of ISO 9001 or ISO 9002 as appropriate.

5.25 Progress Reporting

The Contractor shall submit progress reports on a monthly basis by the end of the first week of the month for the previous month's progress.

5.26 Delivery of Equipment to Installation Sites

The Bidder is fully responsible for organising and guaranteeing timely delivery and transport of the equipment to the installation site.

The Bidder is requested to present detailed information on the schedule of delivery and transport modalities of the equipment to the project site. Close coordination with responsible staff from the procuring entity is recommended. The Bidder is requested to consider site conditions having a potential influence on delivery and installation.

5.27 Transfer of Ownership

An Acceptance Inspection will be organised by the procuring entity and in presence of the Seller will allow for the issuance of a certificate to transfer ownership to the Purchaser.

5.28 Warranty

Two types of warranty have to be offered by the Bidder:

- a) Warranty on hardware failures on all products offered and used according to international established terms;
- b) Warranty on the proper operation of the provided equipment according to the specification and terms fixed in the contract between the bidder and the procuring entity.

5.29 After Sales Service

The Supplier must provide a local after-sales service of no less than 3 years.

5.30 Commissioning

Commissioning refers to inspection and testing the solar PV system after installation and certifying that it operates as expected and is installed according to the design plans and complies with NEC 2017 Articles 690 and 705.



SUPPLIER'S BID



TO: Guyana Energy Agency

Dear Sir / Madam,

Having examined the bidding documents including Annexes and Addenda No. _____ [specify numbers], the receipt of which is hereby acknowledged, we offer to execute the ~~Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lot 1-4~~ in accordance with the Contract conditions attached herein for the total amount for the following:

The Price of our bid, including VAT (where applicable) is:

Lot No.	Amount in Figures	Amount in Words
Lot 1		
Lot 2		
Lot 3		
Lot 4		

We undertake, if our Bid is accepted, to supply the Goods, in accordance with a delivery schedule given in the Schedule of Requirements.

If our Bid is accepted, we undertake to furnish the Performance security in the form of _____ to the amount of _____, comprising _____% of the Contract Price in order to execute the Contract properly and within the time period(s) specified in the Bidding Documents.

We hereby confirm that this bid shall be valid during _____ days starting from the date established for bid opening, and it shall be binding until the expiry of the indicated period.

We understand that you are not bound to accept the lowest or any bid you receive.

Dated the _____ day of _____ 2025.

Duly authorized to sign the Bid for and on behalf of

(name of Supplier)

(Full name)

(Title)

(Signature and seal)

PRICE SCHEDULE

Bidders are required to (a) enter the bid prices electronically (refer to Excel attachment for Price schedule tables) , (b) print out the completed Price Schedule and (c) include it in the hardcopy submission to NPTA on the day of tender opening. Bidders must submit a soft PDF version for the Price Schedule with the bid submission on the flash drive.

Lot No.	Brief Description of Goods	Quantity	Unit Price (GYD)	Delivery/ Installation Cost	Total Cost (GYD)
<p>Lot 1</p> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">NATIONAL PROCUREMENT & TENDER ADMINISTRATION</p> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">13 MAR 2025</p> <p style="writing-mode: vertical-rl; transform: rotate(180deg);">APPROVED</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in the village of Kariako, Region One</p> <p>a) PV modules</p> <p>b) Ground mounting structure</p> <p>c) PV Inverters</p> <p>d) Charge Controllers (If required)</p> <p>e) Hybrid Inverters</p> <p>f) Batteries and Management System</p> <p>g) Web-based system energy monitoring system</p> <p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p>				

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
Lot 1	<p>Design, Supply & Construction of an Overhead 1km Low Voltage 120/240Vac Electrical Distribution Network at Karaiko:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network. - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
Lot 1	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in White Water and Arakuru, Region 1 as follows:</p>				

NATIONAL PROCUREMENT
 & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

NATIONAL PROCUREMENT
 & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrad Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site, n) Lightning Protection equipment integrated into the Solar PV Array and BoS System. 				
<p>Lot 1</p>	<p>Design, Supply & Construction of an Overhead Electricity Distribution Network in <i>White Water, Region 1</i>:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). 				

	<ul style="list-style-type: none"> - Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network. - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 1</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Mashabo Region, 1 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system Cabling and miscellaneous components Grounding system and overcurrent protection devices j) Fire Extinguisher 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
<p>Lot 1</p>	<p>Design, Supply & Construction of an Overhead Low Voltage 120/240Vac Electrical Distribution Network at Mashabo, Region 1:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings <p>Supply and Installation of Complete Guy Sets Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)</p>				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION

13 MAR 2025

APPROVED

	<ul style="list-style-type: none"> - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 1</p>	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in St. Cuthbert's Mission, Region 4 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
Lot 1	<p>Design, Supply & Construction of a 0.85km Overhead Low Voltage 120/240Vac Electrical Distribution Network at St. Cuthbert's Mission, Region 4:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) <p>Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)</p> <ul style="list-style-type: none"> - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
SUBTOTAL for Lot 1:					
Lot	Design, Supply, Installation and Commissioning of a 106kWp Solar				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

2	<p>Photovoltaic inclusive of a 458kWh energy storage system in Kamarang Settlement, Region 7 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrd Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site, n) Lightning Protection equipment integrated into the Solar PV Array and BoS System. 				
Lot 2	<p>Design, Supply & Construction of an Overhead Electrical Transmission (2.8km) and Distribution (2) Network at Kamarang Settlement, Region 7:</p> <ul style="list-style-type: none"> - Single-Phase step-up Pad/Pole 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

13 MAR 2025

APPROVED

mounted Transformer inclusive of all hardware and foundation works, 120 kVA, Inverter Voltage/13.8kV, 60Hz

- Single-Phase distribution Pole mounted Transformer inclusive of all hardware, 25 kVA, 13.8kV/120/240V, 60Hz (7 – 25kVA at Kamarang Settlement)
- Supply and Installation of Primary and Secondary Poles (12 meters and 9 meters respectively) inclusive of all hardware.
- Takeoff structure from PV Farm inclusive of pole, RCO, standoff brackets with insulators, etc.
- Supply and Installation of Rural Cut-Out (100Amps) 15 kV
- Supply and Stringing of Aluminum Conductor 7 Strand 1/0 AWG, Poppy for the two (2) wire MV network and all required hardware
- Supply and stringing of 19 strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network

Supply and Installation of service drops from the LV distribution network to the respective buildings

Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)

- Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

<p>Lot 2</p>	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Issano/Tasserene, Region 7 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) <p>Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <ul style="list-style-type: none"> m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site, n) Lightning Protection equipment integrated into the Solar PV Array and BoS System. 				
<p>Lot 2</p>	<p>Design, Supply & Construction of a 1.82km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Issano/Tasserene, Region 7:</p>				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION

13 MAR 2025

APPROVED

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
 - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
 - Supply and Installation of service drops from the LV distribution network to the respective buildings
 - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)
 - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

Lot
2

Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kaburi, Region 7 as follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**
 13 MAR 2025
APPROVED

	<p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
<p>Lot 2</p>	<p>Design Supply & Construction of a 0.5km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kaburi, Region 7:</p> <p>Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).</p> <ul style="list-style-type: none"> - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch 				

	<p>Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)</p> <ul style="list-style-type: none"> - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 2</p>	<p>Design, Supply, Installation and Commissioning of a 87.5kWp Solar Photovoltaic inclusive of a 395kWh energy storage system in Karrau, Region 7 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
Lot 2	<p>Design, Supply & Construction of a 0.6km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kaburi, Region 7:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
Lot 2	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Micobie, Region 8 as</p>				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters
- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 1km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Micobie, Region 8:

Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV

NATIONAL PROCUREMENT & TENDER ADMINISTRATION

Lot 2

13 MAR 2025

APPROVED

	<p>System equipment to the associated community/public buildings).</p> <ul style="list-style-type: none"> - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 2</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kaibarupai, Region 8 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
--	---	--	--	--	--

<p>Lot 2</p> <p>NATIONAL PROCUREMENT & TENDER ADMINISTRATION</p> <p>13 MAR 2025</p> <p>APPROVED</p>	<p>Design, Supply & Construction of a 0.7km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kaibarupai, Region 8:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading 				
---	---	--	--	--	--

	<p>(vertical, longitudinal, transverse and wind loads must be considered)</p> <ul style="list-style-type: none"> - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
SUBTOTAL for Lot 2:					
Lot 3	<p>Design, Supply, Installation and Commissioning of a 46kWp Solar Photovoltaic inclusive of a 208kWh energy storage system in Shulinab, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV-Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2015
 APPO

- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 1.4km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Shulinb, Region 9:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings
- Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)
- Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

Lot
3

APPROVED

Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy

Lot
3

storage system in Parabara, Region 9 as follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters
- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate illumination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 0.6km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Parabara, Region 9:

Lot 3

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the

NATIONAL PROCUREMENT & TENDER ADMINISTRATION

13 MAR 2025

APPROVED

	<p>shortest route from the Solar PV System equipment to the associated community/public buildings).</p> <ul style="list-style-type: none"> - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 3</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kwatamang, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) Hybrid Inverters Batteries and Management System Web-based system energy monitoring system 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<p>h) Cabling and miscellaneous components</p> <p>i) Grounding system and overcurrent protection devices</p> <p>j) Fire Extinguisher</p> <p>k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)</p> <p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
<p>Lot 3</p>	<p>Design, Supply & Construction of a 0.8km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kwatamang, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch 				

NATIONAL PROCUREMENT
 & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<p>Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)</p> <ul style="list-style-type: none"> - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 3</p>	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Sawariwau, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION

13 MAR 2025

APPROVED

	<p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
<p>Lot 3</p>	<p>Design, Supply & Construction of a 0.95km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Sawariwau, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

<p style="text-align: center;">Lot 3</p>	<p>Design, Supply, Installation and Commissioning of a 51kWp Solar Photovoltaic inclusive of a 265kWh energy storage system in Maruranau, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate illumination for evening/night time hours at the site, n) Lightning Protection equipment integrated into the Solar PV Array and BoS System. 				
<p style="text-align: center;">Lot 3</p>	<p>Design, Supply & Construction of a 0.5km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Maruranau, Region 9:</p>				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

Lot 3
13 MAR 2025

APPROVED

<ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Potarinau, Region 9 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system 				

- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters
- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 0.515km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Potarinau, Region 9:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings
- Supply and Installation of Complete Guy Sets (Guys are

Lot 3

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)

- Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Rupertee, Region 9 as follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)

Lot
3

NATIONAL PROCUREMENT
& TENDER ADMINISTRATION

13 MAR 2023
APPROVED

	<p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
<p>Lot 3</p>	<p>Design, Supply & Construction of a 0.7km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Rupertee, Region 9:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) <p>Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)</p> <p>Vegetation Clearing along distribution network/cable route</p> <p>- Transportation of Material</p>				

NATIONAL PROCURE
& TENDER ADMINISTRATION
 13 MAR 2025
APPROVED

Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Katoonarib, Region 9 as follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System
- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)

Lot 3

l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters

m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting fixtures) to provide adequate illumination for evening/night time hours at the site,

n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

NATIONAL PROCUREMENT & TENDER ADMINISTRATION

13 MAR 2025

APPROVED

Lot 3


Design, Supply & Construction of a 0.5km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Katoonarib, Region 9:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings
- Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered)
- Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit)
- Vegetation Clearing along distribution network/cable route
- Transportation of Material

SUBTOTAL for Lot 3:

Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Kimbia, Region 10 as follows:

- a) PV modules
- b) Ground mounting structure
- c) PV Inverters
- d) Charge Controllers (If required)
- e) Hybrid Inverters
- f) Batteries and Management System

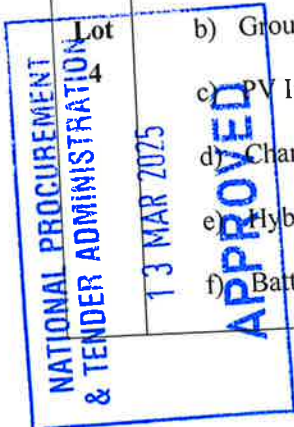

- g) Web-based system energy monitoring system
- h) Cabling and miscellaneous components
- i) Grounding system and overcurrent protection devices
- j) Fire Extinguisher
- k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation)
- l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters
- m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,
- n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.

Design, Supply & Construction of a 0.4km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Kimbia, Region 10:

- Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings).
- Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network
- Supply and Installation of service drops from the LV distribution network to the respective buildings

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
 13 MAR 2025
 APPROVED

	<ul style="list-style-type: none"> - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				
<p>Lot 4</p>	<p>Design, Supply, Installation and Commissioning of a 41.5kWp Solar Photovoltaic inclusive of a 187kWh energy storage system in Wikki Calcuni, Region 10 as follows:</p> <ul style="list-style-type: none"> a) PV modules b) Ground mounting structure c) PV Inverters d) Charge Controllers (If required) e) Hybrid Inverters f) Batteries and Management System g) Web-based system energy monitoring system h) Cabling and miscellaneous components i) Grounding system and overcurrent protection devices j) Fire Extinguisher k) Installation and commissioning materials for PV system (including all materials/components required for electrical interconnection to the community/public buildings mains AC Circuits and interconnection to the nearest community Wifi network to enable online monitoring of the PV Minigrid Installation) 				

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**
 13 MAR 2025
APPROVED

	<p>l) Auxiliary Services: Perimeter Fencing and Housing Infrastructure for batteries & Inverters</p> <p>m) Internal and External Lighting for the battery/inverter building, Perimeter Fence Lighting (Using Stand-alone Solar PV Lighting Fixtures) to provide adequate lamination for evening/night time hours at the site,</p> <p>n) Lightning Protection equipment integrated into the Solar PV Array and BoS System.</p>				
<p>Lot 4</p>	<p>Design, Supply & Construction of a 0.7km Overhead Low Voltage 120/240Vac Electrical Distribution Network at Wikki Calcuni, Region 10:</p> <ul style="list-style-type: none"> - Supply and Installation of Secondary Poles (9 meters) inclusive of all hardware (using the shortest route from the Solar PV System equipment to the associated community/public buildings). - Supply and stringing of 19 strand 4/0 AWG Lepas strand 4/0 AWG Lepas Aluminum Triplex Conductor and all required hardware for LV Distribution network - Supply and Installation of service drops from the LV distribution network to the respective buildings - Supply and Installation of Complete Guy Sets (Guys are required at all End Pole, Branch Poles, Heavy Angle Structures and on any pole structures that are susceptible to heavy loading (vertical, longitudinal, transverse and wind loads must be considered) - Installation of Earth Sets (Earth Sets are required at all transformer structures, transformers, RCOs, the poles before and after the transformer structure and the last pole on any MV/LV circuit) - Vegetation Clearing along distribution network/cable route - Transportation of Material 				

NATIONAL PROCUREMENT & TENDER ADMINISTRATION
13 MAR 2025
APPROVED

SUBTOTAL for Lot 4:	
---------------------	--

Please note that the Procuring Entity will not be responsible for customs clearance of the goods.

Duly authorized to sign for and on behalf of

(name of Bidder)

(Full name)

(Title)

(Signature and seal)

SUPPLY CONTRACT FOR GOODS

THIS CONTRACT made the _____ day of _____ 202__ between *Guyana Energy Agency* (hereinafter referred to as "the Procuring Entity"), on the one hand, and _____ [*name of Supplier*] from _____ [*city and country of Supplier*] (hereinafter referred to as "the Supplier"), on the other hand have come to an Agreement on the following:

The Procuring Entity has announced bid for procurement of goods and services, namely *Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lot 1-4* and has accepted the Supplier's bid for the supply of indicated goods and services to the sum of _____ [*Contract Price in words and figures*] (hereinafter referred to as "the Contract Price").

THIS CONTRACT WITNESSES AS FOLLOWS:

1. In this Contract, the terms and expressions have the same meanings as are respectively assigned to them in the Conditions of Contract referred to.
2. The following documents shall form the Contract and shall be deemed its integral part, viz.:
 - (a) Procuring Entity's Notification of Award;
 - (b) Bid and Price Schedule submitted by Bidder;
 - (c) Schedule of Requirements;
 - (d) Technical Specifications;
 - (e) General Conditions of Contract;
 - (f) Special Conditions of Contract;
 - (g) Other documents included in the Contract documents;
3. This Contract shall prevail over all other Contract documents. In the event of any discrepancy or inconsistency within the Contract documents, then the documents shall prevail in the order listed above.
4. In consideration of the payments to be made by the Procuring Entity to the Supplier as hereinafter mentioned, the Supplier hereby covenants with the Procuring Entity to provide the Goods and Services, and remedy defects therein in conformity in all respects with the provisions of the Contract.
5. The Procuring Entity hereby agrees to pay the Supplier in consideration of the delivery of the Goods and Services and the remedying of defects therein, the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.

IN WITNESS of the aforesaid, the parties hereto have caused this Contract to be executed in accordance with the legislation of Guyana the day and year first above written in the beginning of the document.

Signed and Sealed _____ [*Full name and title of Procuring Entity's representative*]

Signed and Sealed _____ [*Full name and title of Supplier's representative*]

BID SECURITY
(Bank Guarantee or Insurance Bond)

Whereas _____ [name of Bidder] (hereinafter referred as "the Bidder") is ready to submit his bid dated _____ [date of bid submission] for the **Design, Supply, Installation and Commissioning of Solar Photovoltaic Systems and Distribution Networks for Hinterland Communities in Guyana Lot 1-4** (hereinafter referred as "the Bid"),

KNOW ALL PEOPLE, that WE _____ [name of Bank / Surety] from _____ [name of country], having our registered office at the address _____ [address of Bank / Surety], (hereinafter referred as "the Bank"), are bound to _____ [name of Procuring Entity] to the sum of _____, by which payment to the indicated Procuring Entity shall be made in whole and in a timely manner; the Bank is bound on behalf of its name, its successors and authorized persons. This is to confirm that the license issued to the Bank shall provide for activity on issuance of the guarantee, and the person(s) signing that guarantee is entitled to act on behalf of the Bank, and if the approval of Board of Directors, or of General Stockholders Meeting is required, it is already received and there is no other approval required.

THE CONDITIONS of this obligation are as follows:

1. If the Bidder:
 - (a) Withdraws their Bid during the period of bid validity specified by the Bidder on the Form of Bid; or
2. If the Bidder having received notice from the Procuring Entity that their bid is accepted within the period of bid's validity:
 - (a) fails or rejects to sign the Contract at the request of; or
 - (b) fails or rejects to furnish the performance security in accordance with the Instructions to Bidders;

We undertake to pay the Procuring Entity the above sum upon receipt of their first written request, without needing the Procuring Entity to show grounds or reasons of that request, provided that the sum requested by the Procuring Entity is due to him because of the occurrence of one or two or both conditions, specifying the condition or conditions occurred.

This guarantee shall remain in force during _____ days inclusive following the expiry of the bid validity period, and any request in respect thereof should reach the Bank not later than the abovementioned date.

(Full name of Bank / Surety representative)

(Title)

(Signature and seal)

Dated on ____ day of _____ 202__.

Address of the Bank / Surety issuing guarantee:

Manufacturer's Authorization

The Bidder shall require the Manufacturer to fill in this Form in accordance with the instructions indicated. This letter of authorization should be on the letterhead of the Manufacturer and should be signed by a person with the proper authority to sign documents that are binding on the Manufacturer. The Bidder shall include it in its bid, if so indicated in the BDS.]

Date of Bid Submission (day/ month/ year):
IFB No.: [insert number of bidding process]
Alternative No.: [insert identification No if this is a Bid for an alternative]

To: _____ [insert complete name of Purchaser]

WHEREAS

We _____ [insert complete name of Manufacturer], who are official manufacturers of _____ [insert type of goods manufactured], having factories at _____ [insert full address of Manufacturer's factories], do hereby authorize _____ [insert complete name of Bidder] to submit a bid the purpose of which is to provide the following Goods, manufactured by us _____ [insert name and or brief description of the Goods], and to subsequently negotiate and sign the Contract.

We hereby extend our full guarantee and warranty in accordance with Clause 1.3 of the General Conditions of Contract, with respect to the Goods offered by the above firm.

Signed: _____ [insert signature(s) of authorized representative(s) of the Manufacturer]

Name: _____ [insert complete name(s) of authorized representative(s) of the Manufacturer]

Title: _____ [insert title]

Duly authorized to sign this Authorization on behalf of: _____ [insert complete name of Bidder]

Dated on _____ day of _____, _____ [insert date of signing]

Letter of Acceptance
(Letterhead paper of Procuring Entity)

_____ (date)

To: _____
(Name of Supplier)

(address of Supplier)

We hereby notify you that your bid dated the _____ day of _____ 202__, for the supply of goods _____ (*description of goods*) up to a total of _____ (*amount in figures and words*)

as amended and modified in accordance with the Instructions to Bidders is hereby accepted by our agency.

Simultaneously, we send you the Form of Contract and request you, pursuant to Clause 20.1 of the Instructions to Bidders, during seven (7) days to sign and date the Form of Contract and return it at our address. Jointly with the signed Contract, we request you to furnish the performance security, in accordance with ITB Clause 20.2.

You hereby entrusted to start supply of the Goods, in accordance with the terms and conditions of a Contract.

Name of Agency

Full name and Title

Signature of Authorized Representative

Annex: The Contract

Affidavit of Authorization

TO: _____ *[name of Procuring Entity]*

WHEREAS _____ *[name of Supplier]*, who

is the Supplier _____ *[name and/or description of goods]*.

do hereby authorize _____ *[name and address of Supplier's Representative]* to submit the Bid, and sign the Contract based on Invitation for Bids for the abovementioned goods to be supplied by us, and

[Full name, title, signature for and on behalf of Supplier]

Dated on « _____ » day of _____ 202____. (seal)
(date)

Note:

The affidavit of authorization must be drafted on a letterhead of the Supplier and signed by a Commissioner of Oats to Affidavit or Justice of the peace. The Bidder shall include this authorization in their Bid.

EVALUATION AND QUALIFICATION CRITERIA

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**

13 MAR 2025

APPROVED

NO.	DESCRIPTION	
1.	Submission of a valid business registration or certificate of incorporation that is clearly legible. Incorporated companies must submit a list of directors.	
2.	Submission of a valid NIS compliance certificate in the name of the business as per business registration. Document must be clearly legible.	
3.	Submission of a valid GRA compliance certificate in the name of the business as per business registration. Document must be clearly legible.	
4.	Completed and signed supplier's bid form (<i>page 84</i>).	
5.	Completed and signed price schedule must be submitted.	
6.	Completed and signed delivery schedule (<i>page 20-50</i>) or statement of agreement to supply goods/services within the period specified by the Procuring Entity in the delivery schedule.	
7.	Provision of documentation detailing the technical specifications for the items listed in the Schedule of Requirement (<i>page 20-50</i>) or evidence to show that the goods match the requirements of the items listed in the Technical Specifications.	
8.	Submission of bid security in the amount of 2% of the bid price in the form of a bond from an Insurance company licensed by the Bank of Guyana or a bank guarantee or manager's cheque.	
9.	Demonstrate experience and technical capacity by providing documentary evidence that shows the completion of a minimum of two (2) contracts of similar size and scope to the Project over the last two (2) years. Bidder must provide copies of contracts with previous clients. Bidder must also demonstrate the experience of completing contracts of a minimum value of \$7,000,000 for each year over two (2) years.	
10.	Evidence of financial capacity, in the name of the bidder, representing 30% of the bid price. Financial Capacity must be evidence in the form of a bank statement or Line of credit from a bank or Insurance company licensed by the Bank of Guyana. The line of credit must state a figure. The document must be dated within one month of the bid opening date and be clearly legible. When a photocopy is presented, it must be certified a 'true copy of original' by the issuing company	
11.	Bidder must provide a letter of Authorization for the Procuring Entity to seek reference from the bidder's Bank/financial institution relating to the financial capacity evidence supplied. The document must be dated within one month of the bid opening date and be clearly legible.	
12.	Written confirmation of authorizing signatory must be provided. This must be in the form of an Affidavit of Authorization endorsed by a Commissioner of Oaths or Justice of Peace.	
13.	Bidder must provide audited financial statements for the past three years for incorporated companies. Financial statements must be audited by a Chartered accountant/accountancy firm and include an auditor's note. OR Registered businesses must provide Balance Sheets, Profit and Loss Accounts, and Income and Expenditure Accounts for the past three years These financial statements must be approved by a Chartered accountant/accountancy firm. The	

	financial analysis would include: Current ratio: >1 for each year of the last 3 years; Net worth: +ve and minimum of 20% of bid value; Average annual turnover: GY6 million.	
14.	The Bidder shall provide accurate information on the related bidding form as provided on page 128 about any litigation or arbitration resulting from contracts completed or on-going under its execution over the last five years. Pending Litigation: All pending litigation shall in total not represent more 50% of the Bidder's net worth and shall be treated as resolved against the bidder. If bidder has pending litigation representing more than the stated percentage, the bid will not be considered. Litigation History: Non-performance of a contract did not occur as result of supplier's default since 1st January, 2020. If bidder has a history of nonperforming contract the bid will not be considered.	
15.	Bidder must provide a letter stating any or no terminated or abandonment of projects . The letter must be dated within one month of the bid opening date.	
16.	Provision of a signed statement of warranty and/or guarantee for applicable items. At least three (3) years warranty on complete system is required	
17.	Warranty: Two types of warranty have to be offered by the Bidder: 1. Warranty on hardware failures on all products offered and used according to international established terms (3 years minimum) 2. Warranty on the proper operation of the provided equipment according to the specification and terms fixed in the contract between the Bidder and the Procuring Entity (3 years minimum)	
18.	Bidder must provide a statement for the availability of spare parts and/or after sales services. Bidders statement indicating its acceptance or otherwise in offering Local after sales service of no less than three (3) years. Bidder must state the nature of service that will be provided.	
	OVERALL RESPONSIVENESS	

**NATIONAL PROCUREMENT
& TENDER ADMINISTRATION**
 13 MAR 2025
APPROVED

Pending Litigation Format				
<input type="checkbox"/> No pending litigation in accordance with Evaluation Criteria # 14				
Year of dispute	Amount in dispute (currency)	Outcome as Percentage of Net Worth	Contract Identification	Total Contract Amount (current value, currency, exchange rate and USD equivalent)
[insert year]	[insert amount]	[insert percentage]	<ul style="list-style-type: none"> Contract Identification: [indicate complete contract name, number, and any other identification] Name of Purchaser: [insert full name] Address of Purchaser: [insert street/ city/ country] Matter in dispute: [indicate main issues in dispute] Status of dispute: [indicate if it is being treated under Arbitration or being dealt with by the Judiciary] 	[insert amount]

Litigation History

Litigation History Format		
<input type="checkbox"/> No court/arbitral award decisions against the Bidder since 1 st January 2020, in accordance with Evaluation Criteria # 14		
Year of award	Contract Identification	Total Contract Amount (current value, currency, exchange rate and USD equivalent)
	•	
[insert year]	<ul style="list-style-type: none"> Contract Identification: [indicate complete Contract name, number, and any other identification] Name of Purchaser: [insert full name] Address of Purchaser: [insert street/city/country] Matter in dispute: [indicate main issues in dispute] Party who initiated the dispute: [indicate "Purchaser" or "Supplier"] Status of dispute: [indicate if it is being treated by under Arbitration or being dealt with by the Judiciary] 	[insert amount]

